


# Metric Polyethylene Tubing

Series E: Instrument Grade—FDA, NSF Listed  
 Series EB: Ultraviolet Light Resistant

## Fitting Recommendation:

- Parker TrueSeal™ fittings.
- Parker Fast & Tite® fittings.
- A tube support can be used with this tubing for maximum holding power where tensiling, vibration or pressure spikes may occur
- Parker Metric Brass Fittings available from Brass Products Division  
 Otsego, Michigan  
 Phone (616) 694-9411

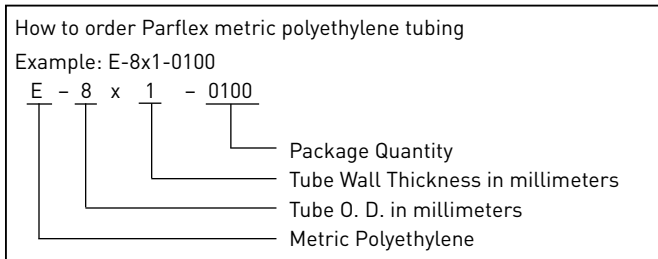

Part Number	Color	O. D. in.	I. D. in.	Wall Thick mm.	Working Pressure at 23°C bar	Min. Burst Pressure at 23°C bar	Reel Length ft.	Min. Bend Radius mm.	Weight lbs. Per 100 ft. (kg.)
#									
E-6X1-0100 EB-6X1-0100	Natural Black	6	4	1	8.6	34.5	100 100	25	1.3 (.59)
E-8X1-0100 EB-8X1-0100	Natural Black	8	6	1	6.9	27.6	100 100	38	1.4 (.64)
E-10X1.5-0100 EB-10X1.5-0100	Natural Black	10	7	1.5	8.6	34.5	100 100	38	2.6 (1.18)
E-12X1.5-0100 EB-12X1.5-0100	Natural Black	12	9	1.5	6.2	24.8	100 100	63	3.2 (1.45)

Hydraulic & Pneumatic Hose & Fit.

PTFE Hose & Fittings

Thermoplastic Tubing

Coiled Air Hose, Fittings & Accessories

Truck (Fleet) Products

Tooling & Equipment

Hose Accessories

Technical & Design Information

Approvals & Guides

numeric index