


Metric Polyurethane Tubing

Series HUM: High Durometer (Metric)

- Polyether base.

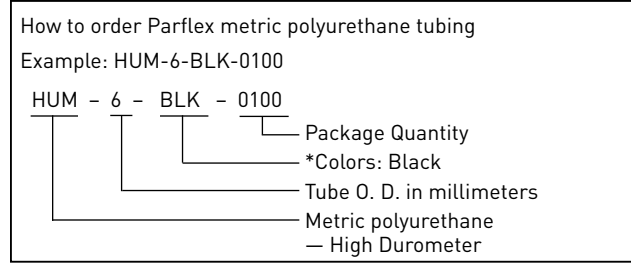

Part Number	Nom. Tube O. D. in.	Nom. Tube I. D. in.	Wall Thick mm.	** Working Pressure at 23°C bar	Min. Burst Pressure at 23°C bar	Coil Length ft.	Weight lbs. Per 100ft. (k.g.)
#							
HUM-4-0100 HUM-4-0500	4	2.4	0.84	12.4	37.2	100 500	.68 (0.31)
HUM-6-0100 HUM-6-0500	6	4.0	1.00	12.4	37.2	100 500	1.30 (.558)
HUM-8-0100 HUM-8-0250	8	5.0	1.50	12.4	37.2	100 500	2.59 (1.17)
HUM-10-0100 HUM-10-0250	10	6.5	1.80	12.4	37.2	100 250	3.84 (1.74)
HUM-12-0100 HUM-12-0250	12	8.0	2.06	12.4	37.2	100 250	4.92 (2.23)

**Suggested working pressure is 1/3 of burst pressure.

Note:

Metric urethane tubing is packaged in the following lengths:
 100 ft. (30.5 meters), 250 ft. (76.2 meters), 500 ft. (152.4 meters).

* Colors: Black-BLK, Red-RED, Navy Blue-DBL, Silver-SIL, Blue-BLU. Consult Division for availability of other color options.

Hydraulic & Pneumatic Hose & Fit.

PTFE Hose & Fittings

Thermoplastic Tubing

Coiled Air Hose, Fittings & Accessories

Truck (Fleet) Products

Tooling & Equipment

Hose Accessories

Technical & Design Information

Approvals & Guides

numeric index