


# Urethane Fast-Stor® Coils

Pigtail Lengths – 16" End #1, 8" End #2  
 Standard color is transparent blue (-TBLU).  
 Other sizes and colors available upon request.  
 Consult factory.



Assembly Part Number	Hose O. D. in.	Hose I. D. in.	Working Length ft.	Coil I. D. in.	Max. Working Pressure PSI at 73°F	Min. Burst PSI at 73°F
#						
UFS-32-TBLU-010	3/16	1/8	10	3/4	125	375
UFS-32-TBLU-025	3/16	1/8	25	3/4	125	375
UFS-42-TBLU-010	1/4	1/8	10	3/4	125	375
UFS-42-TBLU-025	1/4	1/8	25	3/4	125	375
UFS-64-TBLU-010	3/8	1/4	10	1-1/4	125	375
UFS-64-TBLU-015	3/8	1/4	15	1-1/4	125	375
UFS-64-TBLU-020	3/8	1/4	20	1-1/4	125	375
UFS-64-TBLU-025	3/8	1/4	25	1-1/4	125	375
UFS-85-TBLU-010	1/2	21/64	10	2-1/2	125	375
UFS-85-TBLU-015	1/2	21/64	15	2-1/2	125	375
UFS-85-TBLU-020	1/2	21/64	20	2-1/2	125	375
UFS-85-TBLU-025	1/2	21/64	25	2-1/2	125	375
UFS-86-TBLU-010	1/2	3/8	10	2-1/2	85	255
UFS-86-TBLU-020	1/2	3/8	20	2-1/2	85	255
UFS-96-TBLU-010	9/16	3/8	10	2-1/2	125	375
UFS-96-TBLU-015	9/16	3/8	15	2-1/2	125	375
UFS-96-TBLU-020	9/16	3/8	20	2-1/2	125	375
UFS-128-TBLU-010	3/4	1/2	10	3	125	375
UFS-128-TBLU-015	3/4	1/2	15	3	125	375
UFS-128-TBLU-020	3/4	1/2	20	3	125	375
UFS-128-TBLU-025	3/4	1/2	25	3	125	375

Dimensions in inches.

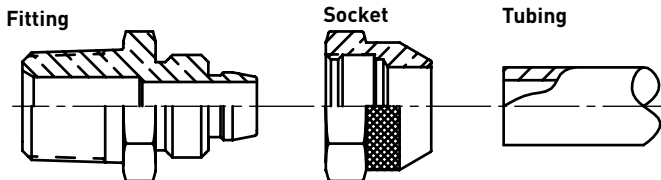

## Assembly Instructions

1. Slide the socket on the tubing with threads facing the end of the tubing.
2. Press the tubing over the Tube Support portion of the fitting until the tube bottoms out. Do not use a lubricant.
3. Push the socket up to meet the mating threads on the fitting, finger tighten the socket onto the fitting.
4. Tighten the fitting and socket until the fitting hex and socket hex meet.

Hydraulic & Pneumatic Hose & Fit.

PTFE Hose & Fittings

Thermoplastic Tubing

Coiled Air Hose, Fittings & Accessories

Truck (Fleet) Products

Tooling & Equipment

Hose Accessories

Technical & Design Information

Approvals & Guides

numeric index