

Pneumatic Quick Couplings

General Purpose – Push-To-Connect Twist-Lock




Specification

Body Size (in.)	1/4	1/2
Rated Pressure (PSI)	300	300
Temperature Range (Nitrile seal)	-40° F to +250° F.	
Locking Device	CAM	
Vacuum Service	Not Recommended	

Performance

Twist-lock (1/4")

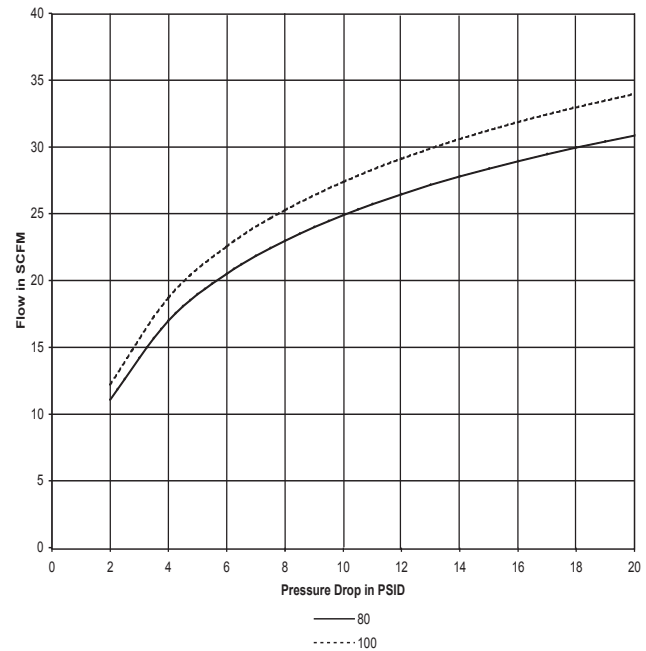


Features

- Engineered for speedy coupling and uncoupling. To lock – push in; to unlock – give the coupler sleeve a 1/8 turn. Designed to protect against accidental uncoupling.
- Push-to-Connect design for easy one hand operation.
- A variety of port configurations are available to meet specific needs.
- Standard Seals are Buna-N (Nitrile).
- Constructed of Zinc bodies and Zinc plated steel sleeves and nipples.
- Interchanges with Schrader Twist-Lock style couplings.

How To Order

TL - 251 - 4FP

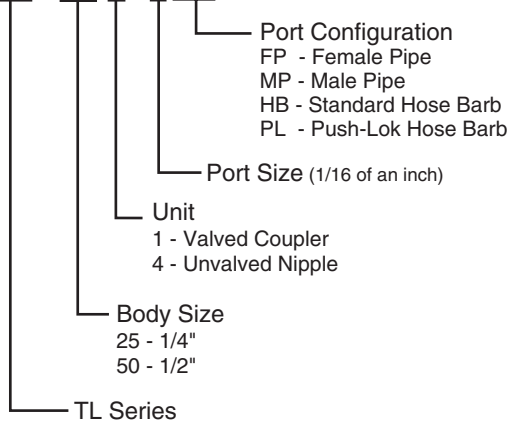

Quick Coupling Division