


Hydraulic Quick Couplings

General Purpose Couplings 60 Series Steam Couplings

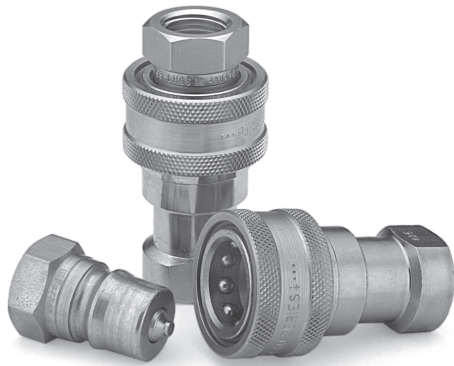


Specifications

Body Size (in.)	1/4 to 1
Temperature Range (std seals)	Ethylene Propylene
Continuous	+250°F
Intermittent	+400°F

Coupler

Female Pipe Thread


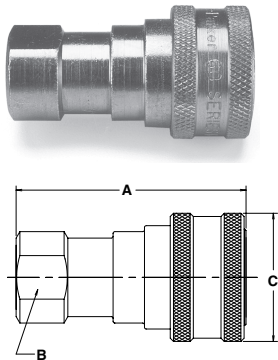


Body Size (in.)	Part No. Brass	Thread Size NPTF	Dimension (in.)			Wt. (LB.) P/Piece
			Overall Length	Wrench Flats	Largest Diameter	
			A	B	C	
1/4	BH2-60-STM	1/4-18	2.26	0.81	1.14	0.30
3/8*	H3-68	3/8-18	2.50	0.88	1.77	0.50
1/2	BH4-60-STM	1/2-14	2.87	1.12	1.77	0.75
3/4	BH6-60-STM	3/4-14	3.56	1.31	2.14	1.31
1	BH8-60-STM	1-11 1/2	4.18	1.62	2.52	1.95

* See Photo and Drawing below for 3/8 inch size coupler configuration.


Coupler - 3/8 Inch Configuration

Female Pipe Thread



Nipple

Female Pipe Thread

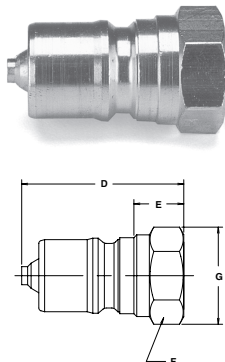

Body Size (in.)	Part No. Brass	Thread Size NPTF	Dimension (in.)				Largest Diameter	Wt. (LB.) P/Piece
			Overall Length	Exposed* Length	Hex Size	Hex Size		
			D	E	F	G		
1/4	BH2-61-STM	1/4-18	1.54	0.65	0.75	0.87	0.08	
3/8	H3-69	3/8-18	1.68	0.52	0.88	1.01	0.13	
1/2	BH4-61-STM	1/2-14	1.94	0.69	1.12	1.30	0.24	
3/4	BH6-61-STM	3/4-14	2.43	0.79	1.38	1.59	0.46	
1	BH8-61-STM	1-11 1/2	2.91	0.99	1.62	1.88	0.76	

* This dimension represents the portion that is exposed when the nipple is inserted into the mating Parker Coupler.

Repair Kits

Steam Coupling

Body Size	Repair Kit Part No.	Used For Part No.
3/8	H68E-67K	H3-68
3/8	H69E-67K	H3-69

B Hydraulics

Quick Coupling Division