

## Hydraulic Quick Couplings

## General Purpose Couplings HP Series (High Pressure Coupling)

B Hydraulics




### Features

- Operating pressures up to 5,000 PSI (350 Bar).
- Soft seat valving prevents leakage when coupler and nipple are disconnected.
- Made of Carbon Steel. Exterior yellow chromate plated for corrosion resistance.
- Smooth Flow Path Minimizes Pressure Drop.
- Buna-N Body Seal supported by PTFE washer. Backup washer keeps seal from extruding at high pressures.
- Heat Treated Nipple and Heavy Duty Locking Collar withstands high pressure surges, hose twist and repeated pressure pulses.
- Buna-N Seals for General Purpose Hydraulic Applications.

### Specifications

Body Size (in.)	1	1-1/2
Rated Pressure (PSI)	5,000	5,000
Rated Flow (GPM)	50	100
Temperature Range (std seals)	-40° to +250°F	

### Performance

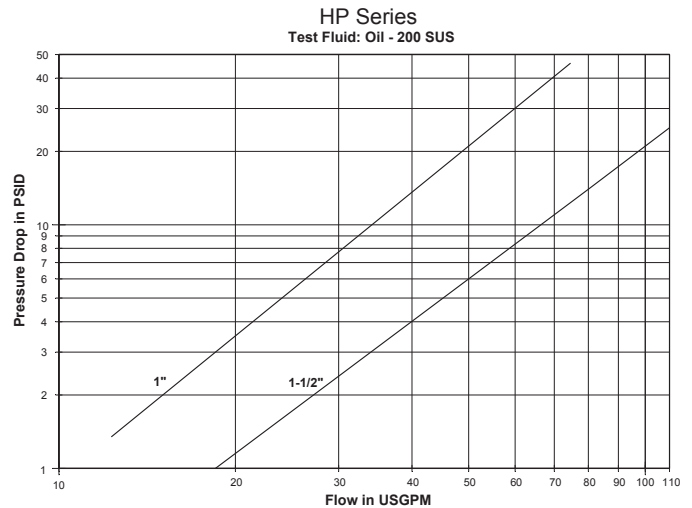

Quick Coupling Division

**GOODYEAR**  
RUBBER PRODUCTS INC.

Call Toll Free: **1-866-711-4673**  
WebSales@GoodyearRubberProducts.com

**We Ship  
World Wide**