

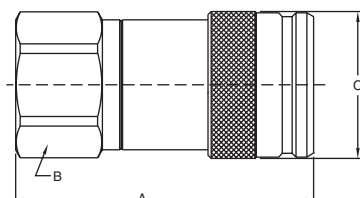



Couplers



Body Size (in.)	Part Number	Thread Size	Overall Length	Hex Size	Largest Diameter	Wt. (LB) P/Piece
			A	B	C	
1/4	FEM-251-4FP-NL	.250-18 NPSF	1.96	1.00	1.06	0.25
1/4	FEM-251-6FO-NL	.562-18 UNF	2.08	1.00	1.06	0.25
3/8	FEM-371-6FP-NL	.375-18 NPSF	2.89	1.06	1.19	0.51
3/8	FEM-371-8FO-NL	.750-16 UNF	2.89	1.06	1.19	0.51
1/2	FEM-501-8FP-NL	.500-14 NPSF	3.04	1.06	1.19	0.93
1/2	FEM-501-8FO-NL	.750-16 UNF	3.04	1.38	1.58	0.93
1/2	FEM-501-10MF-NL	.875-14 UNF	3.22	1.38	1.58	0.91
1/2	FEM-501-10BMS-NL	1.000-14 UNS	4.02	1.38	1.58	0.95
1/2	FEM-501-10BMF-NL	.875-14 UNF	4.03	1.38	1.58	0.93
1/2	FEM-501-12FO-NL	1.062-12 UN	3.24	1.38	1.58	0.93
1/2	FEM-501-12BMF-NL	1.062-12 UN	4.20	1.38	1.58	0.95
5/8	FEM-621-12FO-NL	1.062-12 UNF	3.70	1.50	1.70	1.40
5/8	FEM-621-16MF-NL	1.312-12 UN	3.73	1.50	1.70	1.32
5/8	FEM-621-16BMF-NL	1.312-12 UN	4.57	1.50	1.70	1.34
3/4	FEM-751-12FP-NL	.750-14 NPSF	3.95	1.75	1.95	2.04
3/4	FEM-751-12FO-NL	1.062-12 UNF	3.95	1.75	1.95	2.04
1	FEM-1001-16FP-NL	1.000-11.5 NPSF	4.21	2.00	2.25	2.70
1	FEM-1001-16FO-NL	1.312-12 UNF	4.21	2.00	2.25	2.70

Nipples



Body Size (in.)	Part Number	Thread Size	Overall Length	Exposed Length*	Hex Size	Largest Diameter	Wt. (LB) P/Piece
			D	E	F	G	
1/4	FEM-252-4FP	.250-18 NPSF	1.71	1.25	1.00	1.06	0.17
1/4	FEM-252-6FO	.562-18 UNF	1.83	1.37	1.00	1.06	0.17
3/8	FEM-372-6FP	.375-18 NPSF	2.48	1.83	1.06	1.16	0.32
3/8	FEM-372-8FO	.750-16 UNF	2.48	1.83	1.06	1.16	0.32
1/2	FEM-502-8FP	.500-14 NPSF	2.85	2.15	1.38	1.50	0.54
1/2	FEM-502-8FO	.750-16 UNF	2.85	2.15	1.38	1.50	0.54
1/2	FEM-502-10MF	.875-14 UNF	3.04	2.34	1.38	1.50	0.52
1/2	FEM-502-10BMS	1.000-14 UNS	3.84	3.14	1.38	1.50	0.56
1/2	FEM-502-10BMF	.875-14 UNF	3.85	3.15	1.38	1.50	0.54
1/2	FEM-502-12FO	1.062-12 UN	3.05	2.35	1.38	1.50	0.54
1/2	FEM-502-12BMF	1.062-12 UN	4.02	3.32	1.38	1.50	0.56
5/8	FEM-622-12FO	1.062-12 UN	3.09	2.39	1.50	1.65	0.76
5/8	FEM-622-16MF	1.312-12 UN	3.12	2.42	1.50	1.65	0.68
5/8	FEM-622-16BMF	1.312-12 UN	3.97	3.27	1.50	1.65	0.70
3/4	FEM-752-12FP	.750-14 NPSF	3.38	2.46	1.75	1.94	1.12
3/4	FEM-752-12FO	1.062-12 UN	3.38	2.46	1.75	1.94	1.12
1	FEM-1002-16FP	1.000-11.5 NPSF	3.85	2.93	2.00	2.25	1.72
1	FEM-1002-16FO	1.312-12 UN	3.85	2.93	2.00	2.25	1.72

* This dimension represents the portion that is exposed when the nipple is inserted into the mating Parker Coupler.

Standard Port Configurations

- FP - Female Pipe Thread
- MP - Male Pipe Thread
- FO - Female Straight Thread
- BMF - Bulkhead Male Flare 37° JIC
- MF - Male Flare 37° JIC
- BMS - Bulkhead Male Seal-lok

Other Fitting Port Configurations available upon request.



Quick Coupling Division
8145 Lewis Road
Minneapolis, MN



Call Toll Free: 1-866-711-4673
WebSales@GoodyearRubberProducts.com

We Ship
World Wide

B Hydraulics