




### Description

Parker FH Series high pressure couplings are an innovative product combining the advantages of a flush-face design with a highly technical performance of a rated pressure of 10,000 psi. For safety purposes, this product does not interchange with flush-face couplings having a lower pressure rating.

### Performance

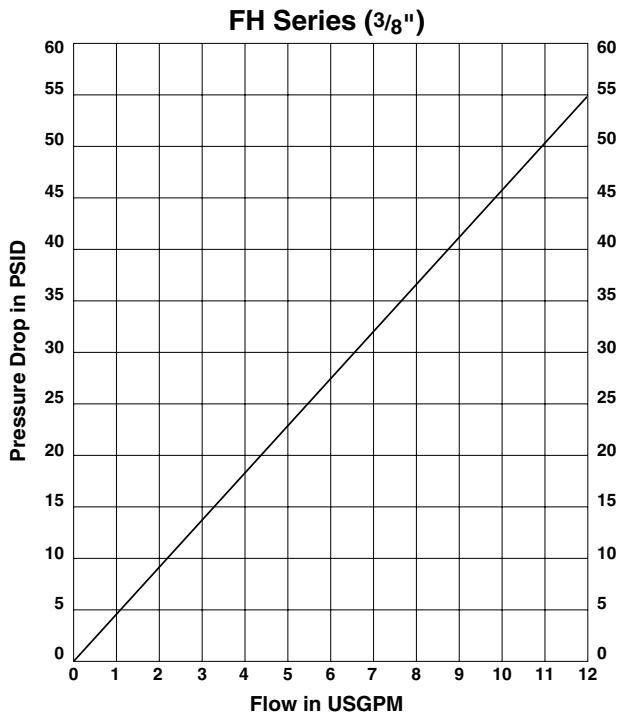

### Features

- 10,000 psi Operating Pressure (700 bar)
- Flush Face, Non-Spill Valving, Both Halves
- Sleeve on coupler and nipple body have a RED finish for identification purposes
- Simple Push-To-Connect Operation
- Sleeve-Lock To Prevent Accidental Disconnect
- Non Interchangeable With Low Pressure Flush Face Couplings
- Meets HTMA Performance And Dimensional Specifications
- Anti Blow-Out BFT Seals

### Applications

- Hydraulic Crimpers, Cutters, Jacks, Benders, Clamps, Wedges
- Rescue Equipment
- High Pressure Test Equipment

**Note:** Protective dust plugs and caps play a crucial role in the life of a quick coupling and no purchase of a hydraulic quick coupling is complete without the selection of an appropriate dust plug and cap. See pages noted in Table of Contents for dust plugs and caps for the Parker full line of hydraulic couplings.

### Materials of Construction

<b>Body:</b>	Steel
<b>Finish:</b>	Zinc Plated with yellow Chromate. Sleeve and Nipple plated with Red Chromate.
<b>Valve:</b>	Flush Face Valves
<b>Seal:</b>	Anti blow-out NBR Nitrile w/BFT seal ( nipple only)

### Specifications

Body Size (in.)	3/8
Rated Pressure (PSI)	10,000
Rated Flow (GPM)	6
Temperature Range	-40° to +250° F
Spillage (ML) (max. per disconnect)	.020
Air Inclusion (ML) (max. per connect)	.070