
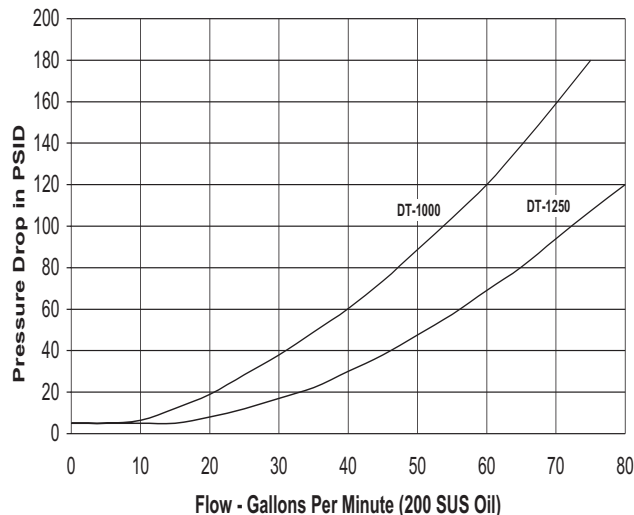


**DT Series**

**Check Valves**

**Flow Data**

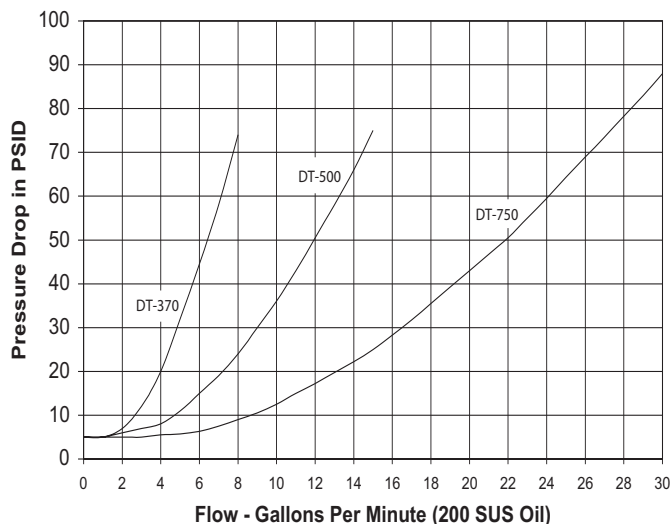

**Check Valves**

**Ordering Information**

*DT Series*

**DT - \* \* \* - \* \* \* \* - \* \***



Standard Crack Pressure is 5 PSI.  
Other Crack Pressures up to 200 PSI in 5 PSI increments. Example: 5 = 5 PSI, 10 = 10 PSI

SERIES	SIZE	FITTING STYLE
370	3/8"	MFMF - Male Flare Inlet to Male Flare Outlet
500	1/2"	MFMO - Male Flare Inlet to Male O-Ring Boss Outlet
750	3/4"	MOMF - Male O-Ring Boss Inlet to Male Flare Outlet
1000	1"	MOMS - Male O-Ring Boss Inlet to Male Face Seal Outlet
1250	1-1/4"	MSMO - Male Face Seal Inlet to Male O-Ring Boss Outlet
		MSMS - Male Face Seal Inlet to Male Face Seal Outlet

Quick Coupling Division



**Call Toll Free: 1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship World Wide**

E Check Valves