


# DC Series

## Check Valves




### Specifications

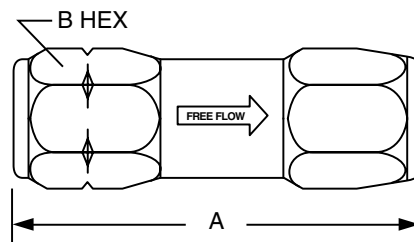

| PART NUMBER    | NOMINAL SIZE | THREAD SIZE     | A    | B    | NET WEIGHT | MAXIMUM OPERATING PRESSURE | CRACK PRESSURE RANGE |
|----------------|--------------|-----------------|------|------|------------|----------------------------|----------------------|
| DC-250-*       | 1/4"         | 1/4-18 NPSF     | 2.44 | 0.81 | .10 KG     | 5000 PSI                   | 5-85 PSI             |
| DC-250-FOFO-*  | 1/4"         | .438-20 UNF     | 2.44 | 0.81 | .10 KG     | 5000 PSI                   | 5-85 PSI             |
| DC-370-*       | 3/8"         | 3/8-18 NPSF     | 2.75 | 0.88 | .13 KG     | 3000 PSI                   | 5-100 PSI            |
| DC-370-FOFO-*  | 3/8"         | .562-18 UNF     | 2.75 | 0.88 | .13 KG     | 3000 PSI                   | 5-100 PSI            |
| DC-500-*       | 1/2"         | 1/2-14 NPSF     | 3.50 | 1.06 | .28 KG     | 3000 PSI                   | 5-90 PSI             |
| DC-500-FOFO-*  | 1/2"         | .750-16 UNF     | 3.50 | 1.06 | .28 KG     | 3000 PSI                   | 5-90 PSI             |
| DC-750-*       | 3/4"         | 3/4-14 NPSF     | 3.88 | 1.37 | .45 KG     | 3000 PSI                   | 5-90 PSI             |
| DC-750-FOFO-*  | 3/4"         | 1.062-12 UN     | 3.88 | 1.37 | .45 KG     | 3000 PSI                   | 5-90 PSI             |
| DC-1000-*      | 1"           | 1-11.5 NPSF     | 4.88 | 1.62 | .68 KG     | 3000 PSI                   | 5-80 PSI             |
| DC-1000-FOFO-* | 1"           | 1.312-12 UN     | 4.88 | 1.62 | .68 KG     | 3000 PSI                   | 5-80 PSI             |
| DC-1250-*      | 1-1/4"       | 1-1/4 11.5 NPTF | 5.94 | 2.00 | 1.4 KG     | 3000 PSI                   | 5-80 PSI             |
| DC-1500-*      | 1-1/2"       | 1-1/2-11.5 NPTF | 6.37 | 2.38 | 2.4 KG     | 3000 PSI                   | 5-65 PSI             |
| DC-2000-*      | 2"           | 2-11.5 NPTF     | 7.00 | 2.88 | 3.7 KG     | 3000 PSI                   | 5-65 PSI             |

\*Designate crack pressure in 5 psi increments. (Not to exceed maximum crack pressure range.)

### Flow Data

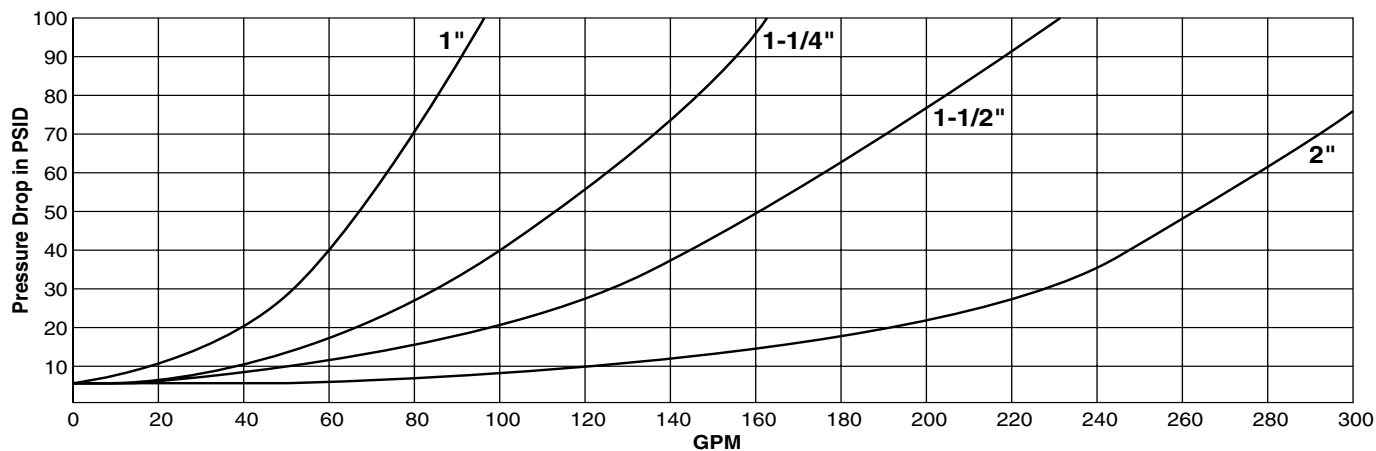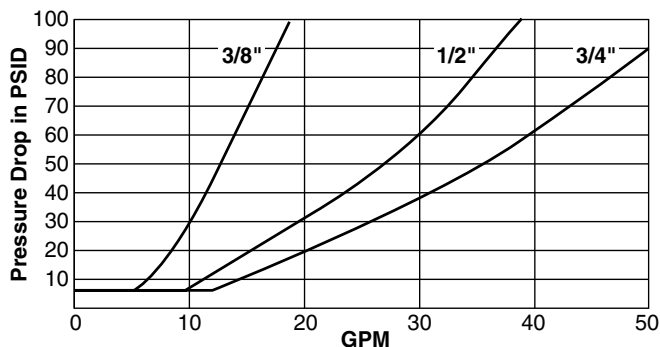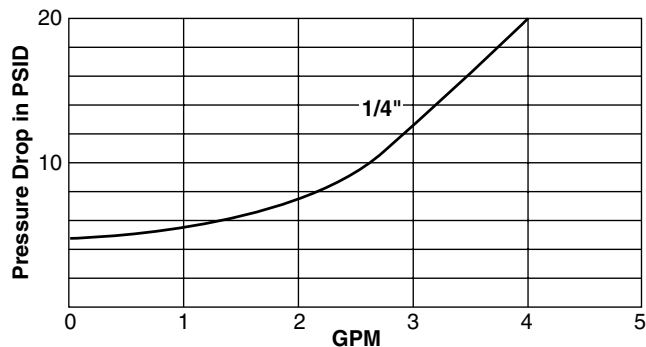

Quick Coupling Division