


**Check Valves**

**Ordering Information**  
DC Series

**DC - \* \* \* - \* \* \* \* - \* \***

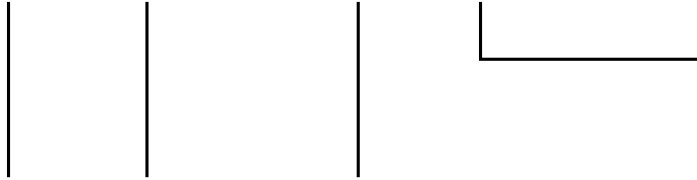

**Standard Crack Pressure is 5 PSI.  
Designate in 5 PSI increments.  
Not to exceed Crack Pressure Range  
for designated size.  
Example: 5 = 5 PSI, 10 = 10 PSI.**

<b>SERIES</b>	<b>SIZE</b>	<b>FITTING STYLE</b>
	250 - 1/4"	"Blank" - Female Pipe Inlet to Female Pipe Outlet
	370 - 3/8"	FOFO - Female O-Ring Boss Inlet to Female O-Ring Boss Outlet
	500 - 1/2"	
	750 - 3/4"	
	1000 - 1"	
	1250 - 1-1/4"	
	1500 - 1-1/2"	
	2000 - 2"	

E Check Valves

Quick Coupling Division



**Call Toll Free: 1-866-711-4673**

WebSales@GoodyearRubberProducts.com

**We Ship  
World Wide**