




Triple-Lok 37° Flared Tube Ends




Triple-Lok Male Flare
Tube End




Triple-Lok Swivel




Triple-Lok Tube End
Assembly

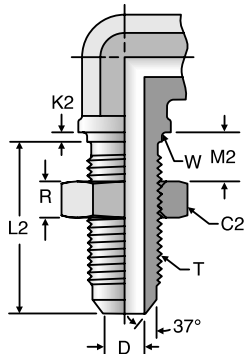

Triple-Lok Shape
Bulkhead



Triple-Lok Straight
Bulkhead



Triple-Lok 2 Male Flare
Tube End

			Thread	Tube Nut Hex	Bulkhead Locknut Hex	Swivel Nut Hex	Max Drill		Male Turn Back		Assembly Allowance		Bulkhead						Max Bulkhead Thickness		Min. Flare Dia.
											Tube Nut	Swivel Nut	Pilot Length - Shapes	Length - Straights	Length - Shapes	Locknut Thickness	Pilot Dia (Max)	Straights	Shapes		
SAE Dash Size	Tube O.D.		T UN/UNF	C (in.)	C2 (in.)	C3 (in.) (mm)		D (in)	D1 (in)	L (in)	L3 (in)	F (in)	TE (in)	K2 (in)	L1 (in)	L2 (in)	R (in)	W ⁽¹⁾ (in)	M1 (in)	M2 (in)	D2 (in)
	(in.)	(mm)																			
2	1/8	—	5/16-24	3/8	9/16	7/16	—	0.062	—	0.45		0.19	0.31	0.094	1.11	0.92	0.22	0.313	0.38	0.25	—
3	3/16	—	3/8-24	7/16	5/8	1/2	—	0.125	—	0.48		0.25	0.33	0.094	1.11	0.92	0.22	0.375	0.38	0.25	—
4	1/4	6	7/16-20	9/16	11/16	9/16	14	0.172	0.156	0.55	0.56	0.19	0.34	0.094	1.20	1.02	0.28	0.438	0.38	0.25	0.254
5	5/16	8	1/2-20	5/8	3/4	5/8	16	0.234	0.217	0.55	0.56	0.30	0.38	0.094	1.20	1.02	0.28	0.500	0.38	0.25	0.314
6	3/8	10	9/16-18	11/16	13/16	11/16	17	0.297	0.263	0.56	0.57	0.28	0.38	0.094	1.28	1.09	0.27	0.563	0.44	0.35	0.359
8	1/2	12	3/4-16	7/8	1	7/8	22	0.391	0.391	0.66	0.66	0.31	0.42	0.125	1.44	1.25	0.31	0.750	0.44	0.35	0.510
10	5/8	14 15 16	7/8-14	1	1 1/8	1	27	0.484	0.446	0.76	0.81	0.38	0.50	0.125	1.58	1.39	0.36	0.875	0.44	0.35	0.610
12	3/4	18 20	1 1/16-12	1 1/4	1 3/8	1 1/4	32	0.609	0.585	0.86	0.91	0.36	0.56	0.125	1.75	1.56	0.41	1.063	0.44	0.35	0.753
14	7/8	22	1 3/16-12	1 3/8	1 1/2	1 3/8	36	0.718	0.680	0.89	0.95	0.38	0.58	0.125	1.75	1.56	0.41	1.188	0.44	0.35	0.849
16	1	25	1 5/16-12	1 1/2	1 5/8	1 1/2	38	0.844	0.769	0.91	0.99	0.34	0.59	0.125	1.75	1.56	0.41	1.313	0.44	0.35	0.940
20	1 1/4	28 30 32	1 5/8-12	2	1 7/8	2	50	1.078	1.020	0.96	1.03	0.34	0.63	0.125	1.80	1.61	0.41	1.625	0.44	0.35	1.198
24	1 1/2	35 38	1 7/8-12	2 1/4	2 1/8	2 1/4	60	1.312	1.230	1.08	1.16	0.50	0.73	0.125	1.81	1.62	0.41	1.875	0.31	0.22	1.416
32	2	—	2 1/2-12	2 7/8	2 3/4	2 7/8	—	1.781	1.736	1.33	1.40	0.55	0.94	0.125	2.09	1.91	0.41	2.500	0.35	0.25	1.994
40 ²⁾	2 1/2	—	3-12	3-3/8	—	—	—	2.281	—	—	—	0.55	—	—	—	—	—	—	—	—	—

1) Recommended clearance hole = W + 0.015.

2) Not a standard SAE J514 size.

Dimensions and pressures for reference only, subject to change.