


DV Full Dimensions

Shut-Off Valve, PN 10

24° Flareless / 24° Flareless

TUBE FITTING PART #	END SIZE 1 & 2 (mm)	M Metric	DN SIZE (mm)	D (mm)	h (mm)	H (mm)	I (mm)	S1 (mm)	S3 (mm)	STANDARD Pressure Rating (bar)		
										EO		
										CF	71	MS
DV06L	6	12 x 1.5	5	50	7	63	88	22	21			10
DV08L	8	14 x 1.5	6	50	7	63	88	22	21			
DV10L	10	16 x 1.5	8	50	7	63	90	22	21			10
DV12L	12	18 x 1.5	10	50	7	63	90	22	21			10
DV15L	15	22 x 1.5	12	50	8	65	93	27	25			10
DV18L	18	26 x 1.5	16	50	8	67	94	27	25			10
DV22L	22	30 x 2	20	60	8	67	108	32	32			10
DV28L	28	36 x 2	25	60	10	95	125	41	38			10
DV35L	35	45 x 2	32	70	10	102	145	50	47			10

Note: The pressure specification PN for hand operated shut-off valves applies to the design factor 1.5 (according to DIN 3230 T5 and ISO 5208). Omit "MS" in the part number for brass material.

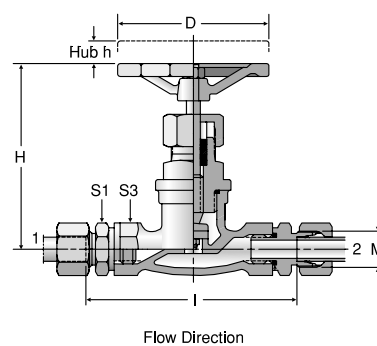
**LD** Full Dimensions

Shut-Off Valve, PN 40

24° Flareless / 24° Flareless

TUBE FITTING PART #	END SIZE 1 & 2 (mm)	DN SIZE (mm)	D (mm)	h LIFT (mm)	H (mm)	I (mm)	STANDARD Pressure Rating (bar)		
							EO		
							CF	71	MS
LD10S	10	6	63	7	98	45			40
LD12S	12	8	63	7	98	49			40
LD14S	14	10	63	7	98	54			40
LD16S	16	12	80	9	110	67			40
LD20S	20	16	80	9	110	69			40
LD25S	25	20	100	12	129	86			40
LD30S	30	25	100	12	129	93			40
LD38S	38	32	100	12	158	108			40

Note: The pressure specification PN for hand operated shut-off valves applies to the design factor 1.5 (according to DIN 3230 T5 and ISO 5208). Omit "MS" in the part number for brass material.



Dimensions and pressures for reference only, subject to change.