


4350 SERIES

3 PIECE FULL PORT B62 (85-5-5) BRONZE BALL VALVES IPS (600 WOG/150 WSP) - ISO 9001

Designed for commercial and industrial use with a broad range of fluid handling applications. This Webstone approved Heavy Duty B62 Bronze (85-5-5) valve has a cast body and features a hard chrome plated solid forged brass ball with Teflon® seats. The valve is actuated by a blowout proof stem with a Teflon® seal that features an adjustable packing nut. Vinyl coated 304 stainless steel handle. The 3 piece design makes in-line repair as easy as 1-2-3. Replacement seats and seals are always in stock and available. B62 bronze is recommended for marine applications.



All Teflon® seated valves
Maximum Temperature is 400°F @ 100 PSI

PRESSURE RATING
600 WOG non-shock
150 WSP


1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1 20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1	BODY	BRONZE (ASTM B62-C83600)
2	END CAP	BRONZE (ASTM B62-C83600)
3	BALL	FORGED BRASS
4	STEM	BRASS B16
5	SEAT	TEFLON® (PTFE)
6	THRUST WASHER	TEFLON® (PTFE)
7	O-RING	NITRATE BUTADIENE (NBR)
8	PACKING GLAND	TEFLON® (PTFE)
9	O-RING	NITRATE BUTADIENE (NBR)
10	GLAND	BRASS C3600
11	CAP NUT	STEEL
12	CAP BOLT	STEEL
13	LEVER HANDLE	SS 304
14	HANDLE JACKET	VINYL GRIP
15	HANDLE NUT	STEEL

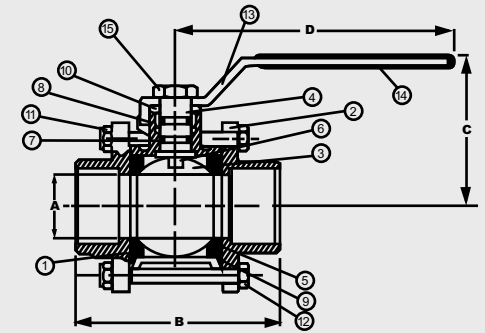


ITEM	SIZE	CTN/CS	A	B	C	D	C _v
43502	1/2	5/50	1/2	2 2/3	2	4 1/3	11.47
43503	3/4	6/36	3/4	3 1/5	2 1/6	4 1/3	27.01
43504	1	4/24	1	3 1/2	2 2/3	4 3/4	49.30
43505	1 1/4	3/18	1 1/4	4 2/3	2 7/8	4 3/4	114.03
43506	1 1/2	2/12	1 1/2	4 3/4	3 1/3	6	161.30
43507	2	2/8	2	5 1/3	3 2/3	6	248.61

C_v The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.

5350 SERIES

3 PIECE FULL PORT B62 BRONZE (85-5-5) BALL VALVES CxC (800 WOG/150 WSP) - ISO 9001

Designed for commercial and industrial use with a broad range of fluid handling applications. This approved Webstone Heavy Duty B62 Bronze (85-5-5) valve has a cast body. A hard chrome plated solid forged brass ball with Teflon® seats. The valve is actuated by a blowout proof stem with a Teflon® seal that features an adjustable packing nut. Vinyl coated 304 stainless steel handle. The 3 piece design makes in-line repair as easy as 1-2-3. Replacement seats and seals are always in stock and available. B62 bronze is recommended for marine applications.



All Teflon® seated valves
Maximum Temperature is 400°F @ 100 PSI

PRESSURE RATING
600 WOG non-shock
150 WSP


1. Conforms to Federal Spec. WWV-35C
2. Solder ends comply with ANSI B16.18
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1	BODY	BRONZE (ASTM B62-C83600)
2	END CAP	BRONZE (ASTM B62-C83600)
3	BALL	FORGED BRASS
4	STEM	BRASS B16
5	SEAT	TEFLON® (PTFE)
6	THRUST WASHER	TEFLON® (PTFE)
7	O-RING	NITRATE BUTADIENE (NBR)
8	PACKING GLAND	TEFLON® (PTFE)
9	O-RING	NITRATE BUTADIENE (NBR)
10	GLAND	BRASS C3600
11	CAP NUT	STEEL
12	CAP BOLT	STEEL
13	LEVER HANDLE	SS 304
14	HANDLE JACKET	VINYL GRIP
15	HANDLE NUT	STEEL

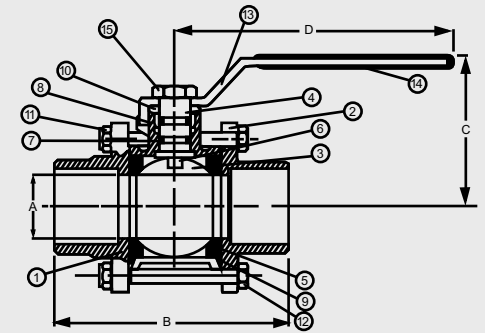

ITEM	SIZE	CTN/CS	A	B	C	D	C _v
53502	1/2	5/50	1/2	2 2/3	2	4 1/3	11.47
53503	3/4	6/36	3/4	3 1/4	2 1/6	4 1/3	27.01
53504	1	4/24	1	3 1/2	2 2/3	4 3/4	49.30
53505	1 1/4	3/18	1 1/4	4 1/3	2 7/8	4 3/4	114.03
53506	1 1/2	2/12	1 1/2	4 2/3	3 1/3	6	161.30
53507	2	2/8	2	5 1/3	3 2/3	6	248.61