


4270 SERIES

FULL PORT FORGED BRASS BALL VALVES IPS (600 WOG/150 WSP) - ISO 9002

Designed for residential, commercial and industrial use with water, oil or gas and can be used with natural, manufactured, mixed, liquefied petroleum and LP gas/air mixtures. Heavy duty forged brass body valve features an extra hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem with a Teflon® seal and features an adjustable packing nut. Vinyl coated stamped steel handle.



All Teflon® seated valves
Maximum Temperature is 400°F @ 100 PSI

PRESSURE RATING

600 WOG non-shock
150 WSP


1. FM (Factory Mutual) approved
2. UL Listed
3. CSA (Canadian Standards Association)
Meets both Canadian and US standards for use with petroleum and natural gas mixtures
4. Conforms to Federal Spec. WWV-35C
5. Threaded ends comply with ANSI B1 20.1
6. Teflon® seats withstand temperatures from -40°F to 400°F
7. Manufactured in an ISO 9002 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1	BODY	FORGED BRASS (ASTM C84400)
2	END CAP	FORGED BRASS (ASTM C84400)
3	SEATS	TEFLON® (PTFE)
4	BALL	BRASS / HARD CHROME PLATE
5	STEM	BRASS (ASTM B16)
6	STEM SEAL	TEFLON® (PTFE)
7	PACKING GLAND	BRASS (ASTM B16)
8	LEVER HANDLE	C.P. STEEL
9	NUT	C.P. STEEL
10	HANDLE JACKET	VINYL GRIP

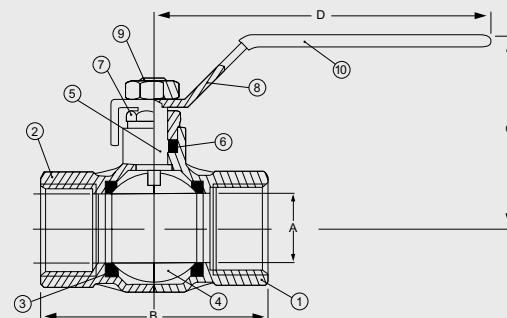


ITEM	SIZE	CTN/CS	A	B	C	D	C _v
42702	1/2	12/144	9/16	2 1/4	1 13/16	3 5/16	11.47
42703	3/4	10/70	3/4	2 5/8	2 1/2	4 3/4	27.01
42704	1	10/70	1	3 1/8	2 5/16	4 7/8	49.30
42705	1 1/4	6/36	1 1/4	3 1/2	3 1/8	5 5/16	114.03
42706	1 1/2	4/24	1 1/2	3 3/16	3 1/2	6 7/16	184.36
42707	2	4/16	2	4 1/2	3 13/16	6 3/8	248.61

Cv The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.

4080 SERIES

FULL PORT NICKEL PLATED FORGED BRASS BALL VALVES - IPS w/STAINLESS STEEL HANDLE (600 WOG/150 WSP) - ISO 9001

Designed for residential, commercial and industrial use with water, oil or gas. Heavy duty nickel plated forged brass body. Extra hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem with a Teflon® seal. The nickel plate on the body will keep the finish bright. Vinyl coated 304 S.S. handle and nut for resistance to corrosion.



All Teflon® seated valves
Maximum Temperature is 400°F @ 100 PSI

PRESSURE RATING

600 WOG non-shock
150 WSP


1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1 20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	FORGED BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS/HARD CHROME PLATE
5.	STEM	BRASS(ASTM B124-C37700)
6.	STEM SEAL	TEFLON® (PTFE)
7.	PACKING GLAND	BRASS (ASTM B124-C37700)
8.	HANDLE	C.P. STEEL
9.	NUT	STEEL
10.	HANDLE JACKET	VINYL GRIP

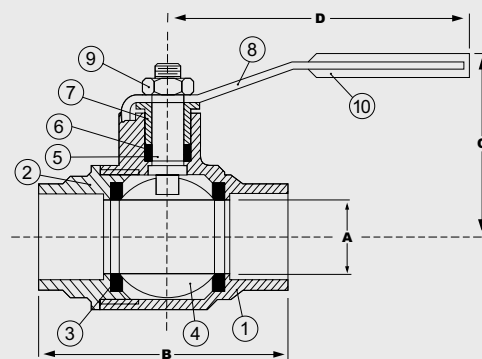

ITEM	SIZE	CTN/CS	A	B	C	D	C _v
40800	1/4	20/120	3/8	1 11/16	1 7/16	3 1/8	7.7
40801	3/8	20/120	3/8	1 11/16	1 15/16	3 3/4	7.88
40802	1/2	20/120	9/16	2 1/16	1 15/16	3 1/2	10.81
40803	3/4	14/84	3/4	2 3/8	2 7/16	3 10/16	27.01
40804	1	8/48	1	2 11/16	2 1/2	4 15/16	49.3
40805	1 1/4	6/36	1 1/4	3 1/4	2 13/16	4 9/16	114.03
40806	1 1/2	4/24	1 1/2	3 11/16	3 1/8	6 1/4	161.3
40807	2	2/16	2	4 1/4	3 13/16	6 1/4	248.61