


4182 SERIES

**STANDARD PORT FORGED BRASS BALL VALVES
IPS (400 WOG/125 WSP) - ISO 9001**

Designed for residential and commercial use with water oil or gas. Heavy duty forged brass body. Extra hard chrome plated brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem with a Teflon® seal and features an adjustable packing nut. Vinyl coated stamped steel handle.



PRESSURE RATING
400 WOG non-shock
125 WSP


1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1.20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	FORGED BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS/HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	STEM SEAL	TEFLON® (PTFE)
7.	PACKING GLAND	BRASS (ASTM B124-C37700)
8.	HANDLE	C.P. STEEL
9.	NUT	C.P. STEEL
10.	HANDLE JACKET	VINYL GRIP

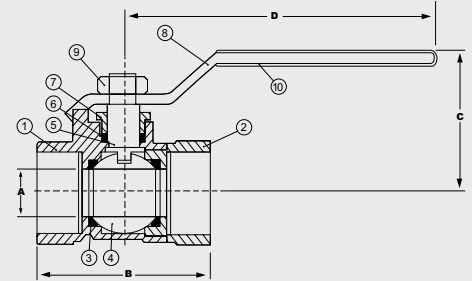


ITEM	SIZE	CTN/CS	A	B	C	D	C _v
41820	1/4	10/120	5/16	1 5/8	1 1/2	3 3/8	7.51
41821	3/8	10/120	5/16	1 5/8	1 1/2	3 3/8	7.72
41822	1/2	10/120	7/16	1 7/8	1 3/4	3 3/8	7.88
41823	3/4	10/80	5/8	2 3/16	1 7/8	3 3/8	14.28
41824	1	6/48	3/4	2 5/8	2 1/8	4 5/8	32.27
41825	1 1/4	4/32	15/16	3	2 1/4	4 5/8	59.82
41826	1 1/2	2/24	1 1/4	3 3/8	3	5 3/8	118.66
41827	2	2/16	1 1/2	3 13/16	2 3/4	5 3/8	158.9
41828	2 1/2	2/4	2	4 5/8	4 1/2	9 1/2	186.14
41829	3	1/3	2 1/2	5 5/8	5	9 1/2	342.33
41830	4	1/2	3	6 3/4	5	9 1/2	511.11

Cv The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.

5182 SERIES

**STANDARD PORT FORGED BRASS BALL VALVES
CxC (400 WOG/125 WSP) - ISO 9001**

Designed for residential and commercial use with water, oil or gas. Heavy duty forged brass body. Extra hard chrome plated brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem with a Teflon® seal and features an adjustable packing nut. Vinyl coated stamped steel handle.



PRESSURE RATING
400 WOG non-shock
125WSP


1. Conforms to Federal Spec. WWV-35C
2. Solder ends comply with ANSI B16.18
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	FORGED BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS/HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	STEM SEAL	TEFLON® (PTFE)
7.	PACKING GLAND	BRASS/HARD CHROME PLATE
8.	HANDLE	C.P. STEEL
9.	NUT	C.P. STEEL
10.	HANDLE JACKET	VINYL GRIP

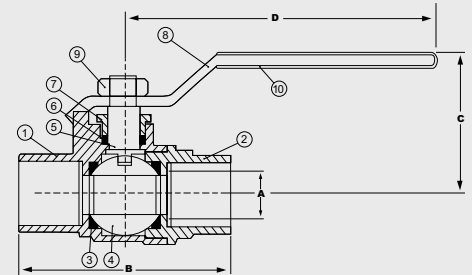

ITEM	SIZE	CTN/CS	A	B	C	D	C _v
51822	1/2	10/120	7/16	2	1 5/8	3 3/8	7.88
51823	3/4	10/80	9/16	2 3/4	1 3/4	3 3/8	14.28
51824	1	6/48	3/4	3 1/2	2 1/4	4 5/8	32.27
51825	1 1/4	4/48	1	3 7/8	2 1/4	4 5/8	59.82
51826	1 1/2	2/32	1 1/4	4 3/8	2 7/8	5 3/8	118.66
51827	2	2/20	1 1/2	5 1/4	3	5 3/8	157.94