


**4067 SERIES**

**FORGED BRASS TEES WITH HI-FLOW BALL VALVE DRAIN - IPS (600 WOG/150 WSP) - ISO 9001**



Designed for residential and commercial use for water, oil and other fluids. Designed by Webstone for the PRO-PAL® series of valves, this approved Webstone valve/fitting saves time and money when installed in any system that requires a drain. This approved valve/fitting features Teflon® seats and stem seal, a blowout proof stem and an adjustable packing gland.



all Teflon® seated valves  
\*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**  
600 WOG non-shock  
150 WSP


1. Threaded ends comply with ANSI B1.20.1
2. Hose end complies with ANSI B1 20.7
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

PRO-PAL® is a registered trademark of Webstone Company Inc.  
Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	FORGED BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS / HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	STEM SEAL	TEFLON® (PTFE)
7.	PACKING GLAND	BRASS (ASTM B124-C37700)
8.	LEVER HANDLE	ZINC w/EPOXY COATING
9.	HANDLE SCREW	BRASS (ASTM B124-C37700)
10.	CAP+CHAIN	BRASS (ASTM B124-C37700) w/NBR HOSE WASHER

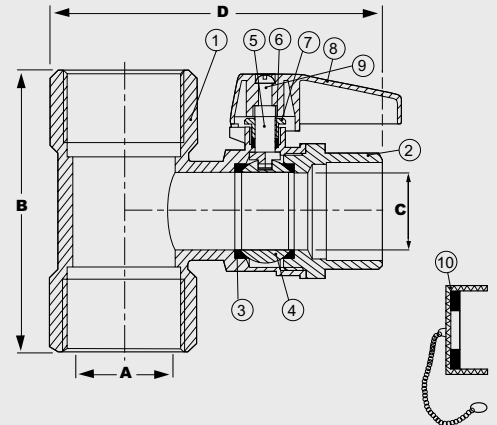


ITEM	SIZE	CTN/CS	A	B	C	D
40672	1/2	10/80	1/2	1 15/16	3/8	2 3/4
40673	3/4	8/48	3/4	2 15/16	1/2	3 1/16
40674	1	8/48	1	2 5/16	1/2	3 5/16
40675	1 1/4	6/24	1 1/4	2 7/8	3/4	4
40676	1 1/2	4/24	1 1/2	2 7/8	3/4	4 5/16
40677	2	2/20	2	3	3/4	4 3/4

**5067 SERIES**

**FORGED BRASS TEES WITH HI-FLOW BALL VALVE DRAIN - CxC (600 WOG/150 WSP) - ISO 9001**



Designed for residential and commercial use for water, oil and other fluids. Designed by Webstone for the PRO-PAL® series of valves, this approved Webstone valve/fitting saves time and money when installed in any system that requires a drain. This approved valve/fitting features Teflon® seats and stem seal, a blowout proof stem and an adjustable packing gland.



all Teflon® seated valves  
\*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**  
600 WOG non-shock  
150 WSP


1. Solder ends comply with ANSI B16.18
2. Hose end complies with ANSI B1 20.7
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

PRO-PAL® is a registered trademark of Webstone Company Inc.  
Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	FORGED BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS / HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	STEM SEAL	TEFLON® (PTFE)
7.	PACKING GLAND	BRASS (ASTM B124-C37700)
8.	LEVER HANDLE	ZINC w/EPOXY COATING
9.	HANDLE SCREW	BRASS (ASTM B124-C37700)
10.	CAP+CHAIN	BRASS (ASTM B124-C37700) w/NBR HOSE WASHER

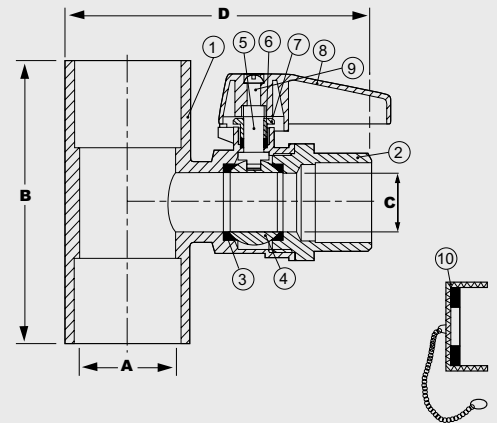

ITEM	SIZE	CTN/CS	A	B	C	D
50672	1/2	10/80	1/2	2	3/8	2 5/8
50673	3/4	8/48	3/4	2 5/16	1/2	2 15/16
50674	1	8/48	1	2 7/8	1/2	3 1/8
50675	1 1/4	6/24	1 1/4	7/16	3/4	3 3/4
50676	1 1/2	4/24	1 1/2	3 7/16	3/4	4 1/16
50677	2	2/20	2	3 5/8	3/4	4 1/2