


**4172 SERIES**

**FULL PORT FORGED BRASS BALL VALVES WITH PLUGGED THREADED GAUGE HOLE - IPS (600 WOG/150 WSP) - ISO 9001**

Designed for residential, commercial and industrial use with water, oil or gas. Heavy forged brass body with a plugged 1/4" threaded hole for a pressure gauge. Hard chrome plated solid brass ball with Teflon® seats. The approved Webstone valve is actuated by a blowout proof stem with a Teflon® seal that features an adjustable packing gland. Vinyl coated stamped steel handle.



a) Teflon® seated valves  
\*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**

600 WOG non-shock  
150 WSP


1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1.20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	<b>BODY</b>	FORGED BRASS (ASTM B283-C37700)
2.	<b>END CAP</b>	FORGED BRASS (ASTM B283-C37700)
3.	<b>SEATS</b>	TEFLON® (PTFE)
4.	<b>BALL</b>	BRASS/HARD CHROME PLATE
5.	<b>STEM</b>	BRASS (ASTM B124-C37700)
6.	<b>PACKING GLAND</b>	BRASS (ASTM B124-C37700)
7.	<b>STEM SEAL</b>	TEFLON® (PTFE)
8.	<b>HANDLE</b>	C.P. STEEL
9.	<b>HANDLE NUT</b>	C.P. STEEL
10.	<b>HANDLE JACKET</b>	VINYL GRIP
10.	<b>GAUGE HOLE NUT</b>	BRASS
11.	<b>WASHER</b>	FIBER

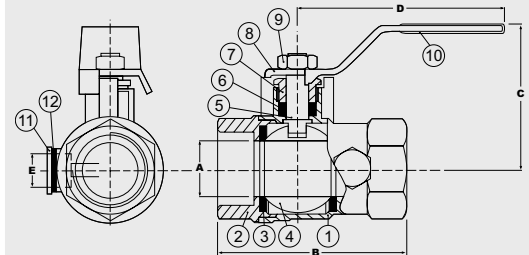


ITEM	SIZE	CTN/CS	A	B	C	D	E	Cv
41722	1/2	10/100	9/16	2 1/2	2 1/8	3 15/16	1/4	11.47
41723	3/4	10/60	3/4	2 1/3	1 7/8	3 13/16	1/4	27.01
41724	1	6/48	1 1/4	3 1/8	2 1/16	4 5/8	1/4	49.30
41725	1 1/4	4/32	1 1/4	3 11/16	2 5/8	4 5/8	1/4	114.03
41726	1 1/2	2/24	1 1/2	4 1/8	3 5/16	5 3/8	1/4	161.30
41727	2	2/16	2	4 5/8	3 9/16	5 3/8	1/4	248.61

Cv: The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.

**4064 SERIES**

**FULL PORT 3 WAY 'L' PORT FORGED BRASS BALL VALVES - IPS (600 WOG/125 WSP) - ISO 9001**

Designed for commercial and industrial use with water, oil or gas. Heavy duty forged brass body. Extra hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem and features an adjustable packing gland. Vinyl coated stamped steel handle. The versatility of this 3 way ball valve allows for many applications. Direct flow in one direction or another or receive flow from different lines. Can be used for fluid mixing.



a) Teflon® seated valves  
\*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**

600 WOG non-shock  
125 WSP


1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1 20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	<b>BODY</b>	FORGED BRASS (ASTM B283-C37700)
2.	<b>END CAP</b>	FORGED BRASS (ASTM B283-C37700)
3.	<b>SEATS</b>	TEFLON® (PTFE)
4.	<b>BALL</b>	BRASS/HARD CHROME PLATE
5.	<b>STEM</b>	BRASS (ASTM B124-C37700)
6.	<b>STEM SEAL</b>	TEFLON® (PTFE)
7.	<b>PACKING GLAND</b>	BRASS (ASTM B124-C37700)
8.	<b>HANDLE</b>	C.P. STEEL
9.	<b>NUT</b>	C.P. STEEL
10.	<b>HANDLE JACKET</b>	VINYL GRIP

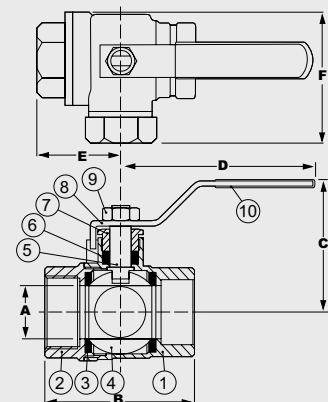

ITEM	SIZE	CTN/CS	A	B	C	D	E	F	Cv
40642	1/2	15/60	1/2	2	1 5/8	3 1/2	1	1 9/16	10.88
40643	3/4	10/40	3/4	2 3/8	2 1/8	4 1/4	1 1/4	2	26.86
40644	1	6/24	1	3	2 3/8	4 1/2	1 7/16	2 1/2	47.35

Cv: The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.