


4053 SERIES

**FULL PORT FORGED BRASS BALL VALVES
MIP x FIP (600 WOG/150 WSP)
w/REVERSIBLE HANDLE - ISO 9001**

Designed for residential and commercial use with water, oil or gas. Heavy duty brass body. Extra hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem and features a Teflon® (PTFE) seal and an adjustable packing gland. Vinyl coated stamped steel handle. Male x Female threads make this valve very economical in applications where a close nipple is needed. Great for many OEM applications.



a | Teflon® seated valves
Maximum Temperature is 400°F @ 100 PSI

PRESSURE RATING

600 WOG non-shock
150 WSP


1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1.20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility.

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	FORGED BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS/HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	STEM SEAL	TEFLON® (PTFE)
7.	PACKING GLAND	BRASS (ASTM B124-C37700)
8.	HANDLE	C.P. STEEL
9.	NUT	C.P. STEEL
10.	HANDLE JACKET	VINYL GRIP

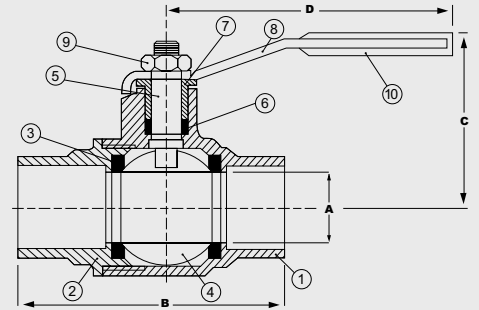


ITEM	SIZE	CTN/CS	A	B	C	D	Cv
40530	1/4	12/96	3/8	2 1/16	1 5/8	3 1/2	7.88
40531	3/8	12/96	3/8	2 1/16	1 3/4	3 5/16	7.88
40532	1/2	12/96	9/16	2 5/16	1 7/8	3 1/2	11.47
40533	3/4	8/48	3/4	2 1/16	2 1/16	3 3/4	27.01
40534	1	6/48	7/8	3	2 1/2	4 7/16	49.30

Cv = The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.

4570 SERIES

**FULL PORT FORGED BRASS BALL VALVES
SWT x FIP (600 WOG/150 WSP)
w/REVERSIBLE HANDLE - ISO 9002**

Designed for residential, commercial and industrial use with water, oil or gas. Heavy duty forged brass body. Extra hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem with a Teflon® seal and features an adjustable packing gland. Vinyl coated stamped steel reversible handle. Change from copper to iron pipe with this design. Ideal for use with dielectric nipples on water heaters.



a | Teflon® seated valves
Maximum Temperature is 400°F @ 100 PSI

PRESSURE RATING

600 WOG non-shock
150 WSP


1. UL listed
2. Conforms to Federal Spec. WWV-35C
3. Threaded end comply with ANSI B1 20.1
4. Solder end complies with ANSI B16.18
5. Teflon® seats withstand temperatures from -40°F to 400°F
6. Manufactured in an ISO 9002 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	FORGED BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS/HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	STEM SEAL	TEFLON® (PTFE)
7.	PACKING GLAND	BRASS (ASTM B124-C37700)
8.	LEVER HANDLE	C.P. STEEL
9.	NUT	C.P. STEEL
10.	HANDLE JACKET	VINYL GRIP

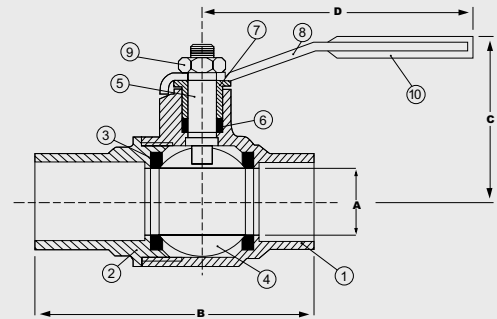

ITEM	SIZE	CTN/CS	A	B	C	D	Cv
45702	1/2	10/100	1/2	2 3/16	1 15/16	3 5/8	11.47
45703	3/4	5/60	3/4	2 5/8	2 1/8	3 9/16	27.01
45704	1	5/40	15/16	3 1/4	2 5/16	4 5/16	49.30