

2155 SERIES & 2157 SERIES


FORGED BRASS GAS BALL VALVES FLARE x FLARE - ISO 9002

Designed for use with natural, manufactured, mixed, liquified petroleum and LP gas/air mixtures. Heavy duty forged brass body. Extra hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem. Handle is constructed of cast aluminum and epoxy coated.



**2155 SERIES
(FLARE x FLARE)**

**2157 SERIES
(MIP x FLARE)**



all Teflon® seated valves
Maximum Temperature is 400°F @ 100 PSI

PRESSURE RATING
1/2 WOG to 175 WOG


1. CGA design Certified
2. UL listed
3. CSA Canadian Standards Association
4. Threaded ends comply with ANSI B1.20.1
5. Teflon® seats withstand temperatures from -40°F to 400°F
6. Manufactured in an ISO 9002 Facility
7. ANSI 2.21.15 for use as a gas appliance connector valve for 1/2 lb system

Teflon® is a registered trademark of Dupont.


THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1. BODY	FORGED BRASS (ASTM B283-C37700)
2. END CAP	FORGED BRASS (ASTM B283-C37700)
3. SEATS	TEFLON® (PTFE)
4. BALL	BRASS/HARD CHROME PLATE
5. STEM	BRASS (ASTM B124-C37700)
6. O-RINGS	VITON®
7. HANDLE	ALUMINUM w/EPOXY COATING
8. SCREW	BRASS



ITEM	SIZE	CTN/CS	A	B	C	D
21550	3/8 Flare x 3/8 Flare	12/144	1/4	2 1/2	1 1/2	1 3/16
21551	1/2 Flare x 1/2 Flare	12/144	3/8	2 9/16	1 1/2	1 3/16




ITEM	SIZE	CTN/CS	A	B	C	D
21571	3/8 FLARE x 1/2 MIP	12/144	1/4	2 7/16	1 1/2	1 3/16
21572	1/2 FLARE x 1/2 MIP	12/144	3/8	2 7/16	1 1/2	1 3/16

4168 SERIES & 4169 SERIES

PETCOCKS FULL PORT FORGED BRASS BALL VALVES IPS - (600 WOG/125 WSP) - ISO 9001

Designed for commercial and industrial use with water, oil or gas. Ideal for use where space is restricted. Forged brass body. This approved Webstone valve features a hard chrome plated brass ball with Teflon® seats. A blowout proof stem that is sealed with a Viton® O-ring actuates the valve. Vinyl coated stamped steel handle.



all Teflon® seated valves
Maximum Temperature is 400°F @ 100 PSI

PRESSURE RATING
600 WOG non-shock
125 WSP


1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1.20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.


THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1. BODY	FORGED BRASS (ASTM B283-C37700)
2. END CAP	FORGED BRASS (ASTM B283-C37700)
3. SEATS	TEFLON® (PTFE)
4. BALL	BRASS/HARD CHROME PLATE
5. STEM	BRASS (ASTM B124-C37700)
6. STEM SEAL	TEFLON® (PTFE)
7. PACKING GLAND	BRASS (ASTM B124-C37700)
8. HANDLE	C.P. STEEL
9. NUT	C.P. STEEL
10. HANDLE JACKET	VINYL GRIP

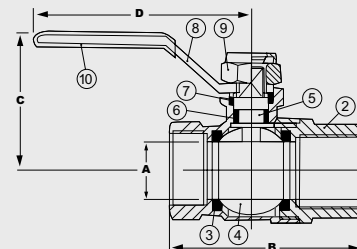

ITEM	SIZE	CTN/CS	A	B	C	D
41685	1/8" FIP x 1/8" MIP	10/100	1/8	1 13/16	1 1/8	1 3/4
41686	1/4" FIP x 1/8" MIP	10/100	1/8	1 13/16	1 1/8	1 3/4
41687	1/4" FIP x 1/4" MIP	10/100	1/4	1 15/16	1 1/8	1 3/4

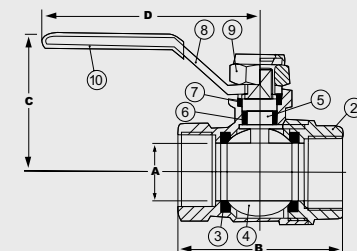

ITEM	SIZE	CTN/CS	A	B	C	D
41698	1/8" FIP x 1/8" FIP	10/100	1/8	1 5/8	1 1/8	1 3/4
41699	1/4" FIP x 1/4" FIP	10/100	1/4	1 5/8	1 1/8	1 3/4