



## FEATURES

- Unique patent pending design
- Heavy forged brass construction
- Conforms to NSF 61-9
- Full port through-out entire valve body
- Available in IPS and SWT connections
- Easy quarter turn ball valve operation
- Allows for easy cleaning or flushing of system
- Allows for one man diagnostic testing of heater unit
- Individually controlled full port drain outlet
- 304 stainless steel wing style handles
- 3/4" outlet for pressure relief valve
- Easy color coded hot & cold union connections
- Each valve is supplied with a cap, chain, & neoprene washer

ITEM	SIZE	CTN/CS	A	B	C	D	E	F	G
40443	3/4	1/8	3/4	4 15/16	1 1/2	1 13/16	2 7/8	3/4	3/4
40653	3/4	1/20	3/4	4 15/16	1 1/2	1 13/16	2 7/8	3/4	3/4
40663	3/4	1/20	3/4	4 15/16	1 1/2	1 13/16	2 7/8	-	3/4
40444	1	1/8	1	5 3/8	2 1/8	2	3 5/16	3/4	3/4
40654	1	1/20	1	5 3/8	2 1/8	2	3 5/16	3/4	3/4
40664	1	1/20	1	5 3/8	2 1/8	2	3 5/16	-	3/4

ITEM	SIZE	CTN/CS	A	B	C	D	E	F	G
50443	3/4	1/8	3/4	5	1 1/2	1 13/16	2 7/8	3/4	3/4
50653	3/4	1/20	3/4	5	1 1/2	1 13/16	2 7/8	3/4	3/4
50663	3/4	1/20	3/4	5	1 1/2	1 13/16	2 7/8	-	3/4
50444	1	1/8	1	5 3/8	2 1/8	2	3 5/16	3/4	3/4
50654	1	1/20	1	5 3/8	2 1/8	2	3 5/16	3/4	3/4
50664	1	1/20	1	5 3/8	2 1/8	2	3 5/16	-	3/4

1.	<b>BODY</b>	FORGED BRASS (ASTM B283-C37700)
2.	<b>END CAP</b>	FORGED BRASS (ASTM B283-C37700)
3.	<b>SEATS (4)</b>	TEFLON® (PTFE)
4.	<b>BALL (2)</b>	BRASS/HARD CHROME PLATE
5.	<b>STEM (2)</b>	BRASS (ASTM B124-C37700)
6.	<b>STEM SEAL (2)</b>	TEFLON® (PTFE)
7.	<b>PACKING GLAND (2)</b>	BRASS (ASTM B124-C37700)
8.	<b>HANDLE</b>	SS 304
9.	<b>HANDLE NUT</b>	SS 304
10.	<b>HANDLE JACKET</b>	VINYL GRIP
11.	<b>LOCK WASHER</b>	SS 304
12.	<b>UNION WASHER</b>	NITRATE BUTADIENE (NBR)
13.	<b>COLORED INSULATOR RING</b>	ABS
14.	<b>UNION NUT</b>	BRASS (ASTM B124-C37700)
15.	<b>UNION FITTING</b>	BRASS (ASTM B124-C37700)
16.	<b>RETAINING SEATS (2)</b>	TEFLON® (PTFE)
17.	<b>DRAIN VALVE HANDLE</b>	ENAMEL COATED ALUMINUM
18.	<b>DRAIN VALVE HANDLE SCREW</b>	BRASS (ASTM B124-C37700)
19.	<b>RETAINING NUT</b>	FORGED BRASS (ASTM B283-C37700)
20.	<b>CAP AND CHAIN</b>	BRASS (ASTM B124-C37700) w/NBR HOSE WASHER

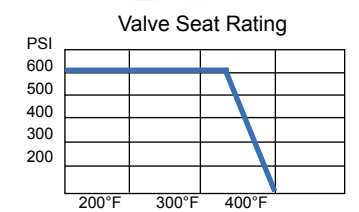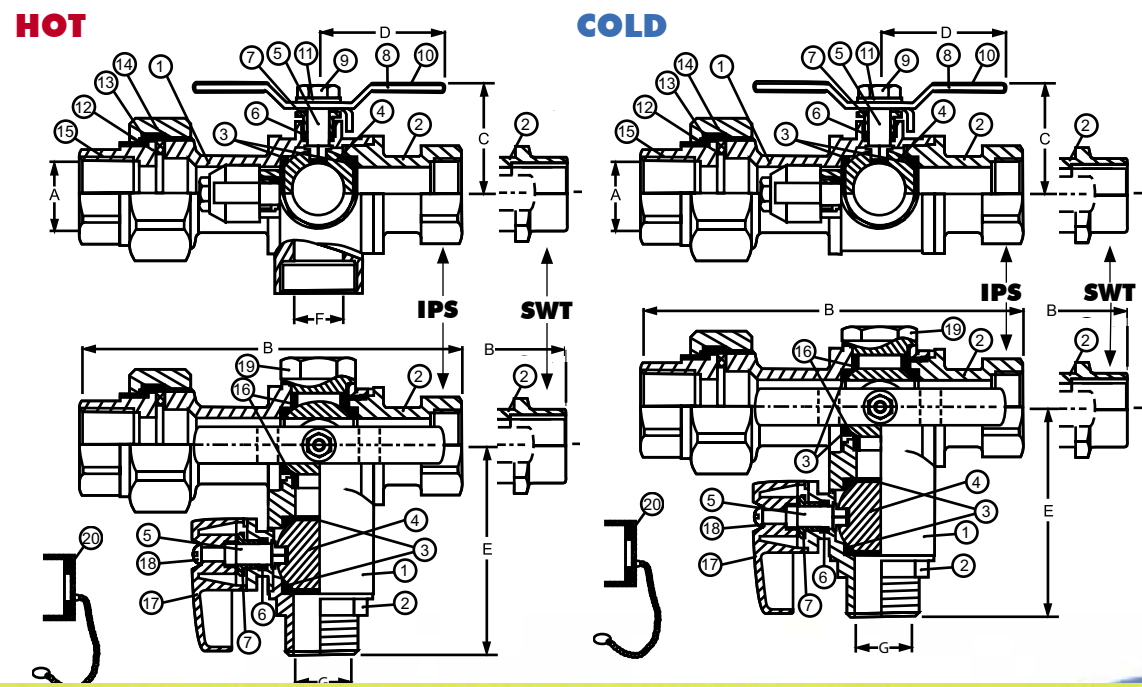

all Teflon® seated valves  
\*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**  
600 WOG non-shock

1. Conforms to NSF 61-9
2. Conforms to Federal Spec. WWV-35C
3. Threaded ends comply with ANSI B1.20.1
4. Solder ends comply with ANSI B16.18
5. Hose ends comply with ANSI B1.20.7
6. Teflon® seats withstand temperatures from -40°F to 400°F
7. Manufactured in an ISO 9001 Facility

## The Only Way to Install Any Tankless Water Heater



# Webstone

Company, Inc.

INNOVATION COMMITMENT