


**4067 SERIES**  
**FORGED BRASS TEES WITH HI-FLOW**  
**BALL VALVE DRAIN - IPS**  
**(600 WOG/150 WSP) - ISO 9001**



Designed for residential and commercial use for water, oil and other fluids. Designed by Webstone for the PRO-PAL® series of valves, this approved Webstone valve/fitting saves time and money when installed in any system that requires a drain or fill valve. This approved valve/fitting features Teflon® seats and stem seal, a blowout proof stem and an adjustable packing gland.



all Teflon® seated valves  
 \*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**  
 600 WOG non-shock  
 150 WSP


1. Threaded ends comply with ANSI B1.20.1
2. Hose end complies with ANSI B1 20.7
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Pro-Pal® is a registered trademark of Webstone Company Inc.  
 Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

|                         |            |                         |
|-------------------------|------------|-------------------------|
| Job/Customer _____      | Date _____ | Contractor _____        |
| Model Specified _____   | Qty _____  | Approved By _____       |
| Designer/Engineer _____ | Date _____ | Contractor's PO # _____ |
| Submitted by _____      | Date _____ | Other _____             |

|     |                      |   |
|-----|----------------------|---|
| 1.  | <b>BODY</b>          | FORGED BRASS (ASTM B283-C37700)               |
| 2.  | <b>END CAP</b>       | FORGED BRASS (ASTM B283-C37700)               |
| 3.  | <b>SEATS</b>         | TEFLON® (PTFE)                                |
| 4.  | <b>BALL</b>          | BRASS / HARD CHROME PLATE                     |
| 5.  | <b>STEM</b>          | BRASS (ASTM B124-C37700)                      |
| 6.  | <b>STEM SEAL</b>     | TEFLON® (PTFE)                                |
| 7.  | <b>PACKING GLAND</b> | BRASS (ASTM B124-C37700)                      |
| 8.  | <b>LEVER HANDLE</b>  | ZINC w/EPOXY COATING                          |
| 9.  | <b>HANDLE SCREW</b>  | BRASS (ASTM B124-C37700)                      |
| 10. | <b>CAP+CHAIN</b>     | BRASS (ASTM B124-C37700)<br>w/NBR HOSE WASHER |

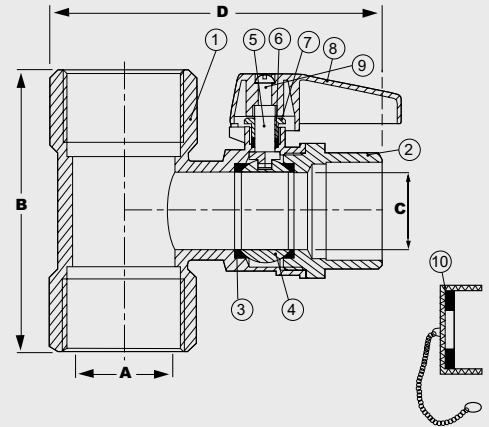


| ITEM  | SIZE  | CTN/CS | A     | B       | C   | D      |
|-------|-------|--------|-------|---------|-----|--------|
| 40672 | 1/2   | 10/80  | 1/2   | 1 15/16 | 3/8 | 2 3/4  |
| 40673 | 3/4   | 8/48   | 3/4   | 2 15/16 | 1/2 | 3 1/16 |
| 40674 | 1     | 8/48   | 1     | 2 5/16  | 1/2 | 3 5/16 |
| 40675 | 1 1/4 | 6/24   | 1 1/4 | 2 7/8   | 3/4 | 4      |
| 40676 | 1 1/2 | 4/24   | 1 1/2 | 2 7/8   | 3/4 | 4 5/16 |
| 40677 | 2     | 2/20   | 2     | 3       | 3/4 | 4 3/4  |

**5067 SERIES**  
**FORGED BRASS TEES WITH HI-FLOW**  
**BALL VALVE DRAIN - CxC**  
**(600 WOG/150 WSP) - ISO 9001**



Designed for residential and commercial use for water, oil and other fluids. Designed by Webstone for the PRO-PAL® series of valves, this approved Webstone valve/fitting saves time and money when installed in any system that requires a drain or fill valve. This approved valve/fitting features Teflon® seats and stem seal, a blowout proof stem and an adjustable packing gland.



all Teflon® seated valves  
 \*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**  
 600 WOG non-shock  
 150 WSP


1. Solder ends comply with ANSI B16.18
2. Hose end complies with ANSI B1 20.7
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Pro-Pal® is a registered trademark of Webstone Company Inc.  
 Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

|                         |            |                         |
|-------------------------|------------|-------------------------|
| Job/Customer _____      | Date _____ | Contractor _____        |
| Model Specified _____   | Qty _____  | Approved By _____       |
| Designer/Engineer _____ | Date _____ | Contractor's PO # _____ |
| Submitted by _____      | Date _____ | Other _____             |

|     |                      |   |
|-----|----------------------|---|
| 1.  | <b>BODY</b>          | FORGED BRASS (ASTM B283-C37700)               |
| 2.  | <b>END CAP</b>       | FORGED BRASS (ASTM B283-C37700)               |
| 3.  | <b>SEATS</b>         | TEFLON® (PTFE)                                |
| 4.  | <b>BALL</b>          | BRASS / HARD CHROME PLATE                     |
| 5.  | <b>STEM</b>          | BRASS (ASTM B124-C37700)                      |
| 6.  | <b>STEM SEAL</b>     | TEFLON® (PTFE)                                |
| 7.  | <b>PACKING GLAND</b> | BRASS (ASTM B124-C37700)                      |
| 8.  | <b>LEVER HANDLE</b>  | ZINC w/EPOXY COATING                          |
| 9.  | <b>HANDLE SCREW</b>  | BRASS (ASTM B124-C37700)                      |
| 10. | <b>CAP+CHAIN</b>     | BRASS (ASTM B124-C37700)<br>w/NBR HOSE WASHER |

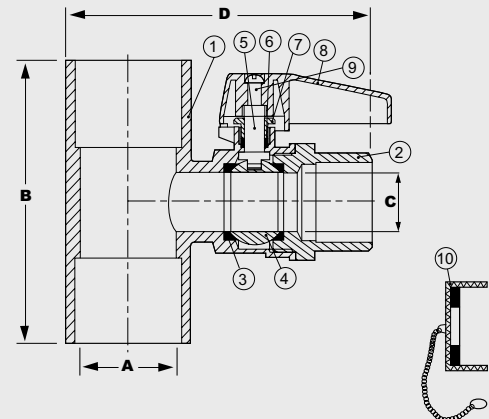

| ITEM  | SIZE  | CTN/CS | A     | B      | C   | D       |
|-------|-------|--------|-------|--------|-----|---------|
| 50672 | 1/2   | 10/80  | 1/2   | 2      | 3/8 | 2 5/8   |
| 50673 | 3/4   | 8/48   | 3/4   | 2 5/16 | 5/8 | 2 15/16 |
| 50674 | 1     | 8/48   | 1     | 2 7/8  | 1/2 | 3 1/8   |
| 50675 | 1 1/4 | 6/24   | 1 1/4 | 7/16   | 3/4 | 3 3/4   |
| 50676 | 1 1/2 | 4/24   | 1 1/2 | 3 7/16 | 3/4 | 4 1/16  |
| 50677 | 2     | 2/20   | 2     | 3 5/8  | 3/4 | 4 1/2   |