


**4061 SERIES**

**FULL PORT FORGED BRASS BALL VALVES WITH HI-FLOW HOSE DRAIN REVERSIBLE HANDLE - IPS (600 WOG/125 WSP) - ISO 9001**



**PATENT PENDING**

Designed for residential, commercial and industrial use with water or oil. Designed by Webstone for the PRO-PAL® series of valves, his approved Webstone valve saves time and money when installed in any system that requires a drain or fill valve. Ideal for use directly after a water meter to isolate a home and purge the system as well as in all radiant and hydronic systems. Heavy duty forged brass body. Hard chrome plated brass balls with Teflon® seats. The valve is actuated by a blowout proof stem with a Teflon® seal that features an adjustable packing nut. Vinyl coated stamped steel lever handle and an epoxy coated aluminum handle. Lever handle is reversible.



all Teflon® seated valves  
\*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**  
600 WOG non-shock  
150 WSP


1. Threaded ends comply with ANSI B1.20.1
2. Hose end complies with ANSI B1 20.7
3. Conforms to Federal Spec. WWV-35C
4. Teflon® seats withstand temperatures from -40°F to 400°F
5. Manufactured in an ISO 9001 Facility

Pro-Pal® is a registered trademark of Webstone Company Inc.  
Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer \_\_\_\_\_ Date \_\_\_\_\_ Contractor \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Qty \_\_\_\_\_ Approved By \_\_\_\_\_  
 Designer/Engineer \_\_\_\_\_ Date \_\_\_\_\_ Contractor's PO # \_\_\_\_\_  
 Submitted by \_\_\_\_\_ Date \_\_\_\_\_ Other \_\_\_\_\_

1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	FORGED BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS / HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	STEM SEAL	TEFLON® (PTFE)
7.	PACKING GLAND	BRASS (ASTM B124-C37700)
8.	LEVER HANDLE	C.P. STEEL
9.	HANDLE NUT	BRASS PLATED STEEL
10.	HANDLE JACKET	VINYL GRIP
11.	DRAIN VALVE LEVER HANDLE	ZINC w/EPOXY COATING
12.	DRAIN VALVE HANDLE SCREW	STEEL
13.	CAP+CHAIN	BRASS (ASTM B124-C37700)

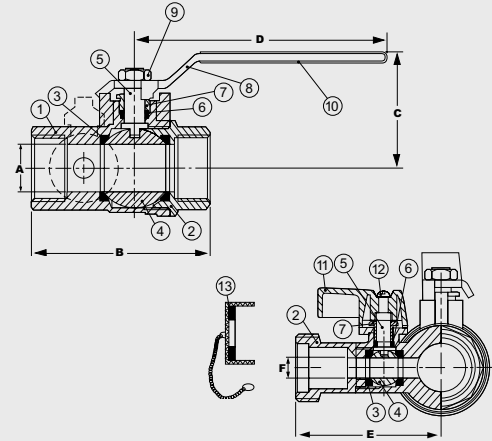

ITEM	SIZE	CTN/CS	A	B	C	D	E	F	C <sub>v</sub>
40612	1/2	10/100	1/2	2 1/2	1 6/8	3 3/8	2 1/4	3/8	11.47
40613	3/4	10/60	3/4	2 3/4	1 7/8	4 1/8	2 1/2	1/2	27.01
40614	1	6/48	1	3 3/8	2 1/4	4 7/8	2 3/4	5/8	49.30
40615	1 1/4	4/32	1 1/4	4	2 1/2	4 7/8	2 7/8	3/4	114.03
40616	1 1/2	2/24	1 1/2	4 3/8	2 6/8	5 3/8	3	3/4	161.30
40617	2	2/12	2	4 7/8	3 1/4	5 3/8	3 3/8	3/4	248.61

Cv. The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.



**5061 SERIES**

**FULL PORT FORGED BRASS BALL VALVES WITH HI-FLOW HOSE DRAIN REVERSIBLE HANDLE - CxC (600 WOG/125 WSP) - ISO 9001**



**PATENT PENDING**

Designed for residential, commercial and industrial use with water or oil. Designed by Webstone for the PRO-PAL® series of valves, his approved Webstone valve saves time and money when installed in any system that requires a drain or fill valve. Ideal for use directly after a water meter to isolate a home and purge the system as well as in all radiant and hydronic systems. Heavy duty forged brass body. Hard chrome plated brass balls with Teflon® seats. The valve is actuated by a blowout proof stem with a Teflon® seal that features an adjustable packing nut. Vinyl coated stamped steel lever handle and an epoxy coated aluminum handle. Lever handle is reversible.

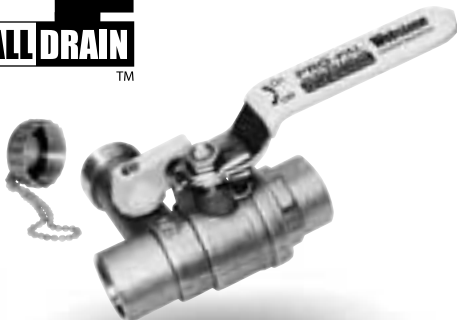

all Teflon® seated valves  
\*Maximum Temperature is 400°F @ 100 PSI\*

**PRESSURE RATING**  
600 WOG non-shock  
150 WSP


1. Solder ends complies with ANSI B16.18
2. Hose end complies with ANSI B1 20.7
3. Conforms to Federal Spec. WWV-35C
4. Teflon® seats withstand temperatures from -40°F to 400°F
5. Manufactured in an ISO 9001 Facility

Pro-Pal® is a registered trademark of Webstone Company Inc.  
Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer \_\_\_\_\_ Date \_\_\_\_\_ Contractor \_\_\_\_\_  
 Model Specified \_\_\_\_\_ Qty \_\_\_\_\_ Approved By \_\_\_\_\_  
 Designer/Engineer \_\_\_\_\_ Date \_\_\_\_\_ Contractor's PO # \_\_\_\_\_  
 Submitted by \_\_\_\_\_ Date \_\_\_\_\_ Other \_\_\_\_\_

1.	BODY	FORGED BRASS (ASTM B283-C37700)
2.	END CAP	FORGED BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS / HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	STEM SEAL	TEFLON® (PTFE)
7.	PACKING GLAND	BRASS (ASTM B124-C37700)
8.	LEVER HANDLE	C.P. STEEL
9.	HANDLE NUT	BRASS PLATED STEEL
10.	HANDLE JACKET	VINYL GRIP
11.	DRAIN VALVE LEVER HANDLE	ZINC w/EPOXY COATING
12.	DRAIN VALVE HANDLE SCREW	STEEL
13.	CAP+CHAIN	BRASS (ASTM B124-C37700)

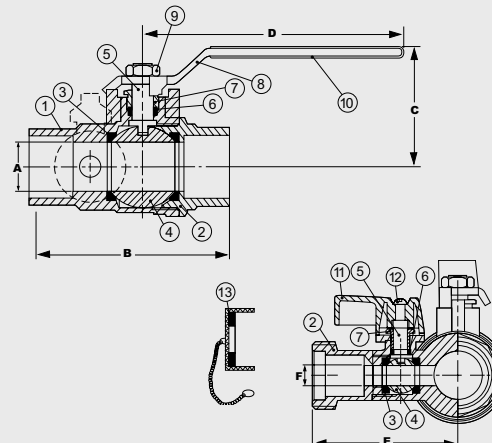

ITEM	SIZE	CTN/CS	A	B	C	D	E	F	C <sub>v</sub>
50612	1/2	10/100	1/2	2 3/4	1 6/8	3 3/8	2 9/16	3/8	11.47
50613	3/4	10/60	3/4	3 1/4	1 3/4	4 1/8	2 3/8	1/2	27.01
50614	1	6/48	1	4	2 1/4	4 7/8	2 5/8	5/8	49.30
50615	1 1/4	4/32	1 1/4	4	2 1/2	4 7/8	2 7/8	3/4	114.03
50616	1 1/2	2/24	1 1/2	5 3/8	2 7/8	5 3/8	3	3/4	161.30
50617	2	2/12	2	6 1/8	3 1/4	5 3/8	3 3/8	3/4	248.61

Cv. The number of gallons of water per minute that pass through the valve at a 1lb pressure drop.