


2256 SERIES

**FORGED BRASS GAS BALL VALVES
IPS - (1/2 WOG to 175 WOG) - ISO 9001**

Designed for residential use with natural, manufactured, mixed, liquefied petroleum and LP gas/air mixtures. Forged brass body. Hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem and sealed with Teflon®. Handle is zinc diecast.



PRESSURE RATING
1/2 WOG to 175 WOG


- CGA design certified.
- UL listed.
- Conforms to Federal Spec. WWV-35C
- Threaded ends comply with ANSI B1 20.1
- Teflon® seats withstand temperatures from -40°F to 400°F
- Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	BODY	BRASS (ASTM B283-C37700)
2.	END CAP	BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS / HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	THRUST WASHER	TEFLON® (PTFE)
7.	STEM SEAL	TEFLON® (PTFE)
8.	PACKING GLAND	BRASS (ASTM B124-C37700)
9.	LEVER HANDLE	ZINC w/EPOXY COATING
10.	HANDLE NUT	BRASS (ASTM B124-C37700)

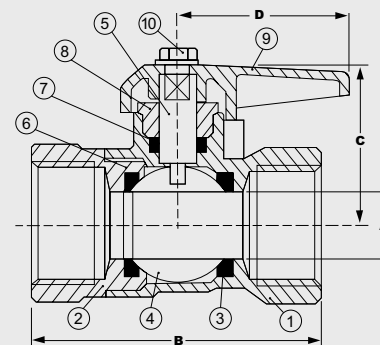


ITEM	SIZE	CTN/CS	A	B	C	D
22561	3/8	10/100	1/8	1 13/16	1 1/8	1 3/4
22562	1/2	10/100	1/8	1 13/16	1 1/8	1 3/4
22563	3/4	10/100	1/4	1 15/16	1 1/8	1 3/4

2152 SERIES & 2252 SERIES

**FORGED BRASS GAS BALL VALVES
FLARE x FIP - (1/2 WOG to 175 WOG) - ISO 9001**

Designed for residential use with natural, manufactured, mixed, liquefied petroleum and LP gas/air mixtures. Forged brass body. Hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem and sealed with Teflon®. Handle is zinc diecast.



PRESSURE RATING
1/2 WOG to 175 WOG


- CGA design certified.
- UL listed.
- CSA (Canadian Standards Association) Meets both Canadian and US standards for use with petroleum and natural gas mixtures
- Conforms to Federal Spec. WWV-35C
- Threaded ends comply with ANSI B1 20.1
- Teflon® seats withstand temperatures from -40°F to 400°F
- Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

THIS SPACE FOR DESIGNER / ENGINEER APPROVAL

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1.	BODY	BRASS (ASTM B283-C37700)
2.	END CAP	BRASS (ASTM B283-C37700)
3.	SEATS	TEFLON® (PTFE)
4.	BALL	BRASS/HARD CHROME PLATE
5.	STEM	BRASS (ASTM B124-C37700)
6.	THRUST WASHER	TEFLON® (PTFE)
7.	STEM SEAL	TEFLON® (PTFE)
8.	PACKING GLAND	BRASS (ASTM B124-C37700)
9.	LEVER HANDLE	ZINC w/EPOXY COATING
10.	HANDLE NUT	BRASS (ASTM B124-C37700)

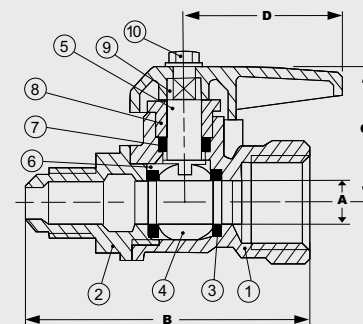

ITEM	SIZE	CTN/CS	A	B	C	D
21526	5/8 FLR x 3/4 FIP	12/144	1/4	1 13/16	1 1/8	1 3/4
22521	3/8 FLR x 1/2 FIP	10/100	1/4	1 13/16	1 1/8	1 3/4
22522	1/2 FLR x 1/2 FIP	10/100	1/4	1 15/16	1 1/8	1 3/4