


**2155 SERIES & 2157 SERIES**

**FORGED BRASS GAS BALL VALVES  
FLARE x FLARE - (1/2 WOG to 175 WOG)  
ISO 9002**

Designed for use with natural, manufactured, mixed, liquefied petroleum and LP gas/air mixtures. Heavy duty forged brass body. Extra hard chrome plated solid brass ball with Teflon® seats. This approved Webstone valve is actuated by a blowout proof stem. Handle is constructed of cast aluminum and epoxy coated.



**PRESSURE RATING**  
1/2 WOG to 175 WOG

1. CGA design Certified
2. UL listed
3. CSA Canadian Standards Association
4. Threaded ends comply with ANSI B1.20.1
5. Teflon® seats withstand temperatures from -40°F to 400°F
6. Manufactured in an ISO 9002 Facility
7. ANSI 2.21.15 for use as a gas appliance connector valve for 1/2 lb system

Teflon® is a registered trademark of Dupont.


**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____


**2155 SERIES  
(FLARE x FLARE)**

**2157 SERIES  
(MIP x FLARE)**

1. BODY	FORGED BRASS (ASTM B283-C37700)
2. END CAP	FORGED BRASS (ASTM B283-C37700)
3. SEATS	TEFLON® (PTFE)
4. BALL	BRASS/HARD CHROME PLATE
5. STEM	BRASS (ASTM B124-C37700)
6. O-RINGS	VITON®
7. HANDLE	ALUMINUM w/EPOXY COATING
8. SCREW	BRASS



ITEM	SIZE	CTN/CS	A	B	C	D
21550	3/8 Flare x 3/8 Flare	12/144	1/4	2 1/2	1 1/2	1 3/16
21551	1/2 Flare x 1/2 Flare	12/144	3/8	2 9/16	1 1/2	1 3/16




ITEM	SIZE	CTN/CS	A	B	C	D
21571	3/8 FLARE x 1/2 MIP	12/144	1/4	2 7/16	1 1/2	1 3/16
21572	1/2 FLARE x 1/2 MIP	12/144	3/8	2 7/16	1 1/2	1 3/16

**4172 SERIES**

**FULL PORT FORGED BRASS BALL VALVES  
WITH PLUGGED THREADED GAUGE HOLE - IPS  
(600 WOG/150 WSP) - ISO 9001**

Designed for residential, commercial and industrial use with water, oil or gas. Heavy forged brass body with a plugged 1/4" threaded hole for a pressure gauge. Hard chrome plated solid brass ball with Teflon® seats. The approved Webstone valve is actuated by a blowout proof stem with a Teflon® seal that features an adjustable packing gland. Vinyl coated stamped steel handle.



**PRESSURE RATING**  
600 WOG non-shock  
150 WSP


1. Conforms to Federal Spec. WWV-35C
2. Threaded ends comply with ANSI B1.20.1
3. Teflon® seats withstand temperatures from -40°F to 400°F
4. Manufactured in an ISO 9001 Facility

Teflon® is a registered trademark of Dupont.

**THIS SPACE FOR DESIGNER / ENGINEER APPROVAL**

Job/Customer _____	Date _____	Contractor _____
Model Specified _____	Qty _____	Approved By _____
Designer/Engineer _____	Date _____	Contractor's PO # _____
Submitted by _____	Date _____	Other _____

1. BODY	FORGED BRASS (ASTM B283-C37700)
2. END CAP	FORGED BRASS (ASTM B283-C37700)
3. SEATS	TEFLON® (PTFE)
4. BALL	BRASS/HARD CHROME PLATE
5. STEM	BRASS (ASTM B124-C37700)
6. PACKING GLAND	BRASS (ASTM B124-C37700)
7. STEM SEAL	TEFLON® (PTFE)
8. HANDLE	C.P. STEEL
9. HANDLE NUT	C.P. STEEL
10. HANDLE JACKET	VINYL GRIP
10. GAUGE HOLE NUT	BRASS
11. WASHER	FIBER

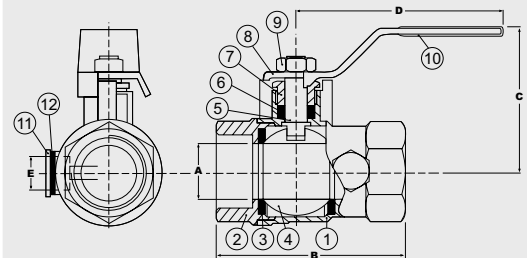

ITEM	SIZE	CTN/CS	A	B	C	D	E	Cv
41722	1/2	10/100	9/16	2 1/2	2 1/8	3 15/16	1/4	11.47
41723	3/4	10/60	3/4	2 1/3	1 7/8	3 13/16	1/4	27.01
41724	1	6/48	1	3 1/8	2 1/16	4 5/8	1/4	49.30
41725	1 1/4	4/32	1 1/4	3 11/16	2 5/8	4 5/8	1/4	114.03
41726	1 1/2	2/24	1 1/2	4 1/8	3 5/16	5 3/8	1/4	161.30
41727	2	2/16	2	4 5/8	3 9/16	5 3/8	1/4	248.61