


INDUSTRIAL SMOOTHBORE - PTFE HOSE

S30 Standard Wall & S40 Heavy Wall Numbering System

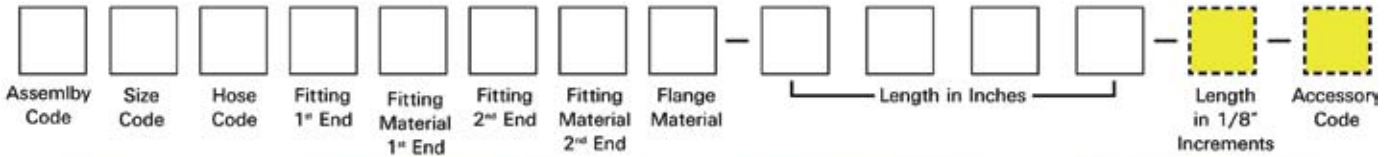

ASSEMBLY CODE	
X	Permanently Attached
FA	Field Attachable

SIZE CODE	
1/8"	03
3/16"	04
1/4"	05
5/16"	06
13/32"	08
1/2"	10
5/8"	12
7/8"	16
1 1/8"	20

HOSE CODE	
S30	S
S30B	SB
S40	H
S40B	HB
ZS40	R
ZS40B	RB
B40	A
MaxPac	W
HiPSI**	

**Note: MaxPac Hose Available with Black Conductive Tube and Female Stainless Steel 37° JIC Swivel Fittings Only

FITTING CODE	
PIPE THREAD FITTINGS	
Male Pipe NPT Hex	10
Male Pipe NPT Step Up	15
Male Pipe NPT Step Down	20
Male Union	11
Male Union 45°	14
Male Union 90°	19
Male Union Step Up	16
Male Union Step Down	21
Female Pipe NPT Hex	55
Female Pipe Step Up	58
Female Pipe Step Down	59
Female Union	80
Female Union Step Up	84
Female Union Step Down	88
JIC Fittings	
JIC Female Swivel	68
JIC Female 45° Elbow	66
JIC Female 90° Elbow	67
SAE Female Swivel	69
SAE Female 45° Elbow	70
SAE Female 90° Elbow	71
JIC Female Step Up	64
JIC Female Step Down	65
TUBE STUB FITTINGS	
Tube Stub	91
Tube Stub Step Up	93
Tube Stub Step Down	95
PAGElok Female Compression	92
SAE Male Compression	96
SAE Female Compression	97
LAUNDRY FLANGE FITTINGS	
Laundry Flange Fitting	72
TIRE MOLD FLANGE	
Tire Mold Flange #60	60
Tire Mold Flange #61	61
Tire Mold Flange #62	62
SANITARY FITTINGS	
Sanitary	40
Sanitary Mini	42
PAINT SPRAY FITTINGS	
Paint Spray Swivel	99
INVERTED FLARE and POWER TRIM FITTINGS	
Male Straight	76
Male 45° Elbow	77
Male 90° Elbow	78
Male Straight Step Down	79
SPECIAL ENDS	
Standard Cut w/o Ends	00
Non Standard Fitting	XX

FITTING MATERIAL	
Stainless	S
Brass	B
Carbon Steel	C

FLANGE MATERIAL	
None	0
Carbon Steel (Epoxy Coated)	D
304 SS	4
316 SS	6
Kynar	K
CPVC	C
PVC	V
Polypropylene	P
Non Standard	X

ACCESSORY CODE	
None	Blank
Spring Guard	S
Armor Guard	A
End Bend Restrictors	E
Fire Sleeve	F
Rubber Sleeve	H
FEP Heat Shrink	T
Polyolefin Heat Shrink	P
Silicone Sleeve	M
Internal Spring	I
Vacuum Spring	W
Wire	
Specials	X

= Optional

EXAMPLE:
X08H10S68S0-0300 = Industrial Smoothbore size 08 (13/32 ID) .040 Wall Stainless Single Braided Hose Coupled with 1/2 - 14 Stainless Male NPT on one end and 3/4 - 16 Stainless Female 37° Seat JIC Swivel on other end, with no flange, with a length of 300 inches from end of male pipe to seat of JIC.

See Accessory Section for Details

Smoothbore PTFE Hose

Convuluted PTFE Hose

Flare Seal Hose

Silicone Hose

Specialty Hoses

Fittings Swage

Accessories

Technical Help

Warranty



Parker Hannifin, Parflex Division



Call Toll Free: 1-866-711-4673

WebSales@GoodyearRubberProducts.com

We Ship World Wide