


Self-Locking Drop Elbows

- Strong arm design increases the strength of the locking arm components.
- Arm hinge points use a double yoke designed to increase strength. There are no side bolts or casting bosses to break.
- No need for the operator to engage or set the locking mechanism because the 6500 series automatically locks the arm onto the fill adapter when the arm is rotated into the locking position.
- Ergonomic arm design contains a lock release lever that the operator can engage or disengage by simply gripping the locking arm. Since the locking mechanism is tucked inside the locking arm it can not be accidentally released.
- Self-locking arm prevents the elbow from popping off due to a hydraulic surge when the underground storage tank overflow valve slams shut.
- Easy to service - all gaskets and repair parts are common to the product line.
- Handle can be mounted to left or right side of elbow

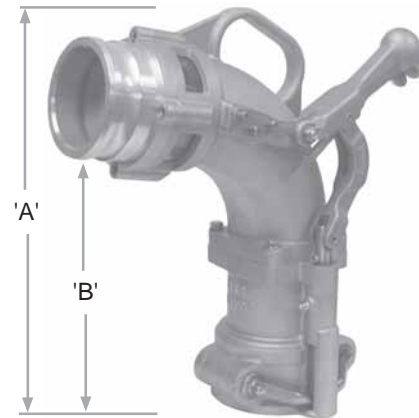

| Part # | Description | 'A' Overall Height | 'B' Ground Clearance |
|----------------|--|--------------------|----------------------|
| 6500 | Tightfill elbow with locking handle | 17-3/4" | 10-7/8" |
| 6500A | Tightfill elbow with locking handle and 4" adapter | 17-3/4" | 10-7/8" |
| 6500B | Tightfill elbow with locking handle and 3" coupler inlet | 17-3/4" | 10-7/8" |
| 6500C | Tightfill elbow with locking handle and 3" adapter inlet | 17-3/4" | 10-7/8" |
| 6500D | Tightfill elbow with locking handle and 4" coupler | 17-3/4" | 10-7/8" |
| 6500X | Tightfill tall model elbow with locking handle | 21" | 13-3/4" |
| 6500XA | Tightfill tall model elbow with locking handle and 4" adapter | 21" | 13-3/4" |
| 6500XB | Tightfill tall model elbow with locking handle and 3" coupler inlet | 21" | 13-3/4" |
| 6500XC | Tightfill tall model elbow with locking handle and 3" adapter inlet | 21" | 13-3/4" |
| 6500XD | Tightfill tall model elbow with locking handle and 4" coupler | 21" | 13-3/4" |
| 6500T | Tightfill elbow with locking handle, anti-spill sleeve | 17-3/4" | 10-7/8" |
| 6500AT | Tightfill elbow with locking handle, anti-spill sleeve and 4" adapter | 17-3/4" | 10-7/8" |
| 6500BT | Tightfill elbow with locking handle, anti-spill sleeve and 3" coupler | 17-3/4" | 10-7/8" |
| 6500CT | Tightfill elbow with locking handle, anti-spill sleeve and 3" adapter | 17-3/4" | 10-7/8" |
| 6500DT | Tightfill elbow with locking handle, anti-spill sleeve and 4" coupler | 17-3/4" | 10-7/8" |
| 6500XT | Tightfill tall elbow with locking handle, anti-spill sleeve | 21" | 13-3/4" |
| 6500XAT | Tightfill tall elbow with locking handle, anti-spill sleeve and 4" adapter | 21" | 13-3/4" |
| 6500XBT | Tightfill tall elbow with locking handle, anti-spill sleeve and 3" coupler | 21" | 13-3/4" |
| 6500XCT | Tightfill tall elbow with locking handle, anti-spill sleeve and 3" adapter | 21" | 13-3/4" |
| 6500XDT | Tightfill tall elbow with locking handle, anti-spill sleeve and 4" coupler | 21" | 13-3/4" |