


QUICK DISCONNECT

HYDRAULIC COUPLINGS

ISO-A Interchange

Nominal Size	Material	Rated Flow	Minimum Burst-Coupler	Minimum Burst-Plug	Minimum Burst Connected
1/4"	Steel	2.5 GPM	27,260 PSI	20,155 PSI	18,850 PSI
3/8"	Steel	6.6 GPM	22,185 PSI	18,125 PSI	17,400
1/2"	Steel	11.3 GPM	18,850 PSI	15,370 PSI	16,820
3/4"	Steel	24.5 GPM	18,705 PSI	17,400 PSI	15,080
1"	Steel	29.7 GPM	16,820 PSI	14,500 PSI	14,500

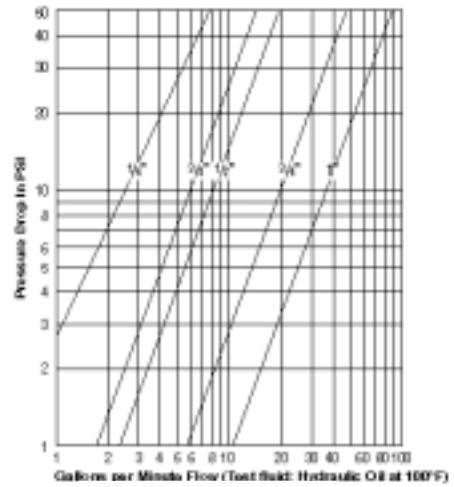

FEMALE PIPE COUPLER




MALE PIPE PLUG

Part #	Body Size	NPT	Working PSI	List Price
ANV-14-F	1/4	1/4	5075	22.56
ANV-38-F	3/8	3/8	4550	33.81
ANV-12-F	1/2	1/2	4500	48.99
ANV-34-F	3/4	3/4	3625	76.95
ANV-1-F	1	1	3335	103.49

Part #	Body Size	NPT	Working PSI	List Price
ANV-14-M	1/4	1/4	5075	10.00
ANV-38-M	3/8	3/8	4550	16.17
ANV-12-M	1/2	1/2	4500	17.64
ANV-34-M	3/4	3/4	3625	32.34
ANV-1-M	1	1	3335	57.48

ISO-B Interchange

Nominal Size	Material	Rated Flow	Minimum Burst-Coupler	Minimum Burst-Plug	Minimum Burst Connected
1/8"	Steel	2.0 GPM	25,300 PSI	23,200 PSI	23,200 PSI
1/4"	Steel	4.2 GPM	27,260 PSI	21,460 PSI	20,880 PSI
3/8"	Steel	8.0 GPM	27,550 PSI	18,850 PSI	19,430 PSI
1/2"	Steel	11.0 GPM	23,780	15,370 PSI	15,370 PSI
3/4"	Steel	24.0 GPM	19,720	15,950 PSI	15,660 PSI
1"	Steel	25.0 GPM	19,720	15,950 PSI	15,660 PSI

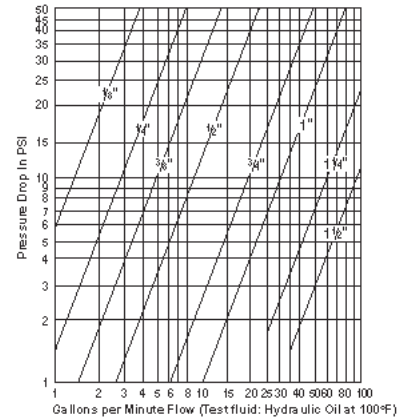

FEMALE PIPE COUPLER



MALE PIPE PLUG

Part #	Body Size	NPT	Working PSI	List Price
HNV-14-F	1/4	1/4	5075	37.93
HNV-38-F	3/8	3/8	4350	41.78
HNV-12-F	1/2	1/2	4060	38.96
HNV-34-F	3/4	3/4	2610	70.63
HNV-1-F	1	1	2175	78.33

Part #	Body Size	NPT	Working PSI	List Price
HNV-14-M	1/4	1/4	5075	17.05
HNV-38-M	3/8	3/8	4350	18.10
HNV-12-M	1/2	1/2	4060	17.64
HNV-34-M	3/4	3/4	2610	32.34
HNV-1-M	1	1	2175	39.56



Call Toll Free: **1-866-711-4673**

WebSales@GoodyearRubberProducts.com

We Ship World Wide

QUICK DISCONNECT