
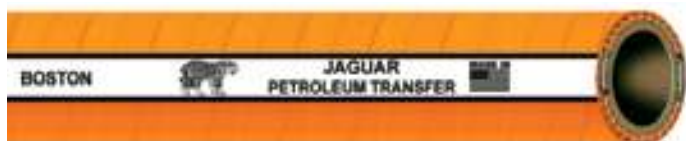


Hose

Heavy Duty Petroleum

 Refer to warnings and safety information on pages 3-4 and page 109.

Boston Jaguar Heavy Duty Petroleum



Tube: Vinyl Nitrile

Reinforcement: Fiber, 2 or 4 Ply and Helical Wires

Cover: Vinyl Nitrile

Color: Orange (6" & 8" Jaguar has a black Vinyl Nitrile cover)

Temperature Range: -40°F to +180°F

Type Of Branding: Printed Strip

Suction: Full Vacuum

Working Pressure: 250 PSI (Depending on coupling and clamps)

Type Of Coupling: Cam and Groove, Combination Nipple or Swaged/Crimped. Clamps—Band.

Features:

- Vinyl nitrile cover
- Vinyl nitrile tube
- Continuous printed brand and caution label every ten feet
- Orange cover

Advantages:

- Abrasion, animal fat, oil and weather resistant
- Easy identification
- Meets OSHA color requirements for flexible pipe systems

Markets:

- Tank Trucks
- Railroad Tank Cars
- Waste Hauling
- Petrochemical/Petroleum Industry

Applications:

- Loading and unloading, pumping, suction
- Bottom loading, gravity flow discharge
- Transfer of petroleum products

CATALOG NUMBER	NOMINAL I.D. (IN)	(MM)	PLY	NOMINAL O.D. (IN)	(MM)	APPROX. LBS. WEIGHT PER 100 FT	MAXIMUM WORKING PRESS. (PSI)	MINIMUM BEND RADIUS (IN.)	(MM)	STANDARD LENGTHS (FT)
H032724-150	1-1/2	38.1	2	2-1/16	52.4	99	250	4.0	101.6	150
H032732-150	2	50.8	2	2-9/16	65.1	124	250	5.0	127.0	150
H032740-150	2-1/2	63.5	2	3-1/32	77.0	161	250	7.5	190.5	150
H032748-150	3	76.2	2	3-9/16	90.5	200	250	8.0	203.2	150
H032764-150	4	101.6	2	4-9/16	115.9	292	250	12.5	317.5	150
H032796	6	152.4	4	7-1/4	184.2	721	250	30.0	762.0	50
H032796-100										100
H032796-150										150
H03278A	8	203.2	4	9-1/8	231.8	909	250	32.0	812.0	50
H03278A-100										100
H03278A-150										150